


Removal and Installation

REMOVAL

- 1 Remove lower dash side finisher (LH). Refer to [Removal and Installation](#).
- 2 Partially remove front door welt (LH). Refer to [Component](#).
- 3 Remove instrument lower panel LH (1) screw (A).

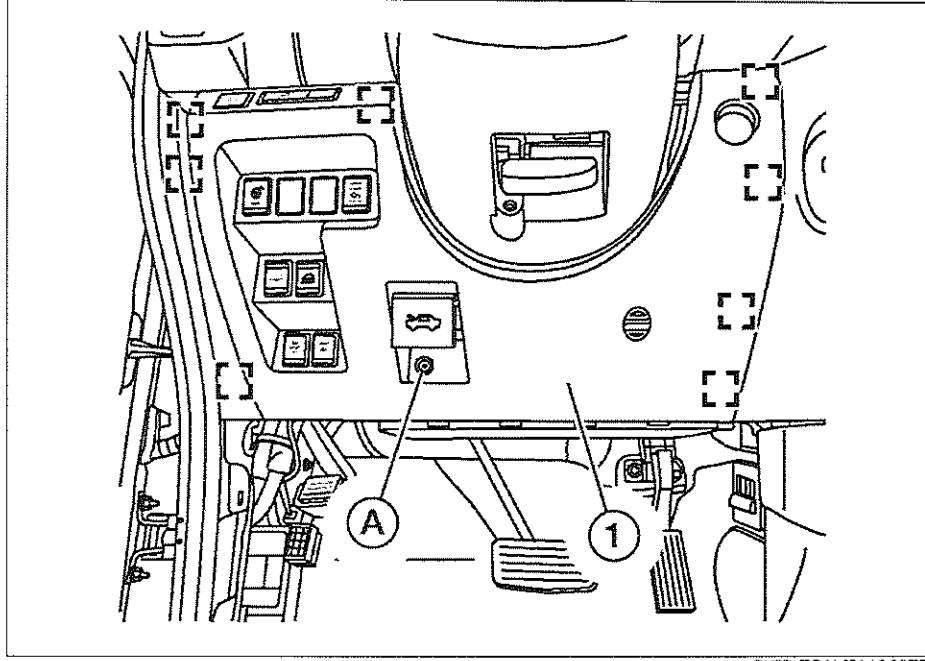

GUID-TGALJIA1060ZZ

[]: Metal Clip

- 4 Using a suitable tool, release clips from instrument lower panel LH (1).
- 5 Disconnect the harness connectors and remove instrument lower panel LH.

INSTALLATION

Installation is in the reverse order of removal.