

Original BMW Accessories.

Installation Instructions.



Aerodynamic Peripherals Retrofit Kit.

BMW 5 Series Saloon (G30)

BMW 5 Series Touring (G31)

BMW M5 (F90)

Retrofit kit number

Number	Component designation	Type	Installation time (h)
51 19 2 414 137	Carbon left/right front attachment	G30/G31	1.00
51 19 2 444 510	Carbon left/right front attachment	G30/G31 MPA	0.75
51 19 2 449 921	Carbon left/right front attachment	F90	0.75
51 19 2 414 139	Carbon front attachment	G30/G31 (MPA)	0.75
51 19 2 411 019	Matt black sill add-on section, left	G30/G31	0.50
51 19 2 411 020	Matt black sill add-on section, right	G30/G31	0.50
51 19 2 447 015	Left side skirt attachment, carbon	F90	0.50
51 19 2 447 016	Right side skirt attachment, carbon	F90	0.50
51 19 2 414 142	Carbon rear spoiler	G30/F90	0.75/1.00
51 19 2 457 441	Carbon Pro rear spoiler	G30/F90	0.75/1.00
51 19 2 414 144	Matt black rear spoiler	G30	0.75
51 19 2 412 405	Carbon rear diffuser	G30/G31	0.50
51 19 2 446 628	Rear diffuser, carbon	F90	0.50
51 19 2 412 406	Matt black rear diffuser	G30/G31	0.50
51 19 2 412 409	Matt black rear bumper cover	G30/G31	0.25
51 19 2 412 410	Matt black rear bumper cover	G30/G31	0.25

Installation time

Installation time, see table. This may vary depending on the condition of the vehicle and its equipment.

The installation time shown does not include any time spent on programming/coding.

The calculation of the total costs for the programming time must be factored into the calculation of retrofitting costs (no invoicing via warranty).

Important information

! For the G30, the "Carbon front attachment" **C** may only be installed on the car with a "Carbon rear spoiler" **BA** or "Carbon Pro rear spoiler" **IA** (see EPC for details and part numbers).

For the G30, the "rear spoiler, carbon" **BA** may only be installed on the car with a "front attachment, carbon" **C** or "air guide, centre" (see EPC for information and part numbers).

For the G30, the "Carbon Pro rear spoiler" **IA** may only be installed on the car with a "Carbon front attachment" **C** (see EPC for information and part numbers). **!**

The "Carbon rear diffuser" **FA** or "carbon rear diffuser" **HA** **cannot** be installed on cars with a trailer tow hitch (**SA 3AC**). The installation of the "Carbon rear diffuser" **FA** or "Carbon rear diffuser" **HA** on cars with Comfort Access (**SA 322**) results in the "Smart Opener" function of this option being disabled which means that it can no longer be used.

After the installation of the "rear diffuser, carbon" **FA, HA** retrofit kit as well as the "left/right front attachment, carbon" **A', B'** and "front attachment, carbon" **C** on the vehicles 550i and 550d (G30/G31 MPA), the retrofit must be programmed/coded via the – **Conversions** – path.

These installation instructions are primarily designed for use within the BMW dealership organisation and by authorised BMW service companies.

These installation instructions are intended for use by qualified specialist staff trained on BMW vehicles with the relevant expert knowledge.

All work must be completed using the latest BMW repair manuals, wiring diagrams, servicing manuals and work instructions, in a logical order, using the prescribed tools (special tools), and observing current health and safety regulations.

If you experience installation or function problems, restrict troubleshooting to approx. 0.5 hours for mechanical work and 1.0 hour for electrical work.

To avoid unnecessary extra work and/or costs, send an inquiry straight away to the technical parts support team via the Aftersales Assistance Portal (ASAP).

Quote the following information:

- Chassis number,
- retrofit kit part number,
- a detailed description of the problem,
- any work already carried out.

Do not archive the hard copy of these installation instructions since daily updates are provided via ASAP.

Pictograms



Denotes instructions that draw your attention to dangers.



Denotes instructions that draw your attention to special features.



Denotes the end of the instruction or other text.

Installation information

- All contact/bonding surfaces on the components being installed must be absolutely dry, clean, and free of wax, silicone and grease. These surfaces must be treated with suitable BMW cleaner or BMW primer (see EPC for details), as set out in the appropriate product application instructions.
- If you use adhesive tape, it must be applied using a contact pressure of between 10 N/cm² and 50 N/cm².
- Take care not to damage the parts when opening the packaging.
- Check that all the parts fit accurately on the car before fitting them.
- All the components and their bonding surfaces must be at room temperature for installation. The ideal relative humidity is 50%. Different values will change the specified times.
- After completing the bonding and installation work, the car must remain stationary at room temperature for at least **12 hours**.
- If adhesives are used, the car may be driven after **24 hours**, and may be taken through a car wash after **48 hours**. The car must not be driven above a speed of $v_{\max} < 100$ km/h for 24-48 hours.
- The installed parts may become loose and fly off the car if you fail to wait for the full reaction time of the primer/adhesive. **Danger of accidents!**
- Installation is shown in some instances on one side of the car only; proceed in the same way on the other side.
- All illustrations show LHD (left-hand drive) cars; proceed similarly on RHD (right-hand drive) cars.

Terminology used

Initial installation: "Carbon front add-on section" **C** is installed for the first time.

Re-installation (for example in the event of a repair): The corresponding "Carbon front add-on" **C** must be re-installed.

Painting instructions

Check that all the parts fit accurately on the car before painting them. Primed parts must be pre-treated accordingly before painting.

To ensure correct painting, the installation instruction must be provided to the painter.

The BMW painting instructions must be observed (see ISTA No./AIR No. 99 00 ...).

Ordering instructions

The materials such as liquid adhesive, cleaner and activators are assigned to the relevant products in the EPC (see EPC for information and part numbers). If the EPC does not explicitly specify the materials, always use cleaner, adhesive and activator from the BMW product range.

Special tools required

None

Information to be provided to the customer

The following add-on sections can be painted if required by the customer:

- "Matt black sill add-on section, right" **AA**
- "Matt black left side sill add-on section" **AB**
- "Matt black rear spoiler" **CA**
- "Matt black rear bumper cover" **DB**
- "Matt black rear diffuser" **EA**



Installation of the "front attachment, carbon" **C** reduces the car's ground clearance and overhang angle at the front. Check the "front attachment, carbon" **C** at regular intervals for damage caused by collisions and, in the event of any such damage, have it replaced by trained specialist personnel. ◀


Table of contents

Section	Page
1. Preparatory work	5
2. "Front attachment, carbon" parts list G30/G31	6
3. "Front attachment, carbon" parts list F90	8
4. "Side skirt attachment in matt black" G30/G31 and "side skirt attachment, carbon" parts list F90	9
5. "Rear spoiler, carbon" parts list G30/F90	10
6. "Matt black rear spoiler" parts list G30	11
7. "Carbon Pro rear spoiler" parts list G30/F90	12
8. "Matt black rear bumper cover" parts list G30/G31	13
9. "Matt black rear diffuser" parts list G30/G31	14
10. "Rear diffuser, carbon" parts list G30/G31	15
11. "Rear diffuser, carbon" parts list F90	16
12. Installing the "right/left front attachment, carbon" G30/G31	17
13. Installing the "front attachment, carbon" G30/G31	19
14. Installing the "right/left front attachment, carbon" F90	24
15. Installing "side skirt film" G30/G31/F90	26
16. Installing "side skirt attachment in matt black" G30/G31 and "side skirt attachment, carbon" F90	27
17. Installing the "Carbon rear spoiler" G30/F90	30
18. Installing the "matt black rear spoiler" G30	32
19. Install the "Carbon Pro rear spoiler" G30/F90	34
20. Installing the "exhaust system support adapter cover" G30/G31	36
21. Installing the "matt black rear diffuser" G30/G31	39
22. Installing the "rear diffuser, carbon" G30/G31	41
23. Installing the "rear diffuser, carbon" F90	44
24. Concluding work and coding	45

1. Preparatory work

The following components must be removed first of all	ISTA No./AIR No.
Only if installing the "left/right front attachment, carbon" G30/G31	
Left/right air guide	---
Only if installing the "left/right front attachment, carbon" G30/G31 and "front attachment, carbon" G30/G31	
Left/right air guide and front engine shield	---
Upper shock absorber (for 550i and 550d cars only)	---
Only if installing the "Carbon rear spoiler"	
Rear spoiler (if standard component already installed)	---
Only if installing the "matt black rear diffuser" G30/G31 and "rear diffuser, carbon" G30/G31	
Underfloor trim	---
Rear trim	51 12 ...
"Exhaust system support adapter cover"	---
Control units and antennas of "exhaust system support adapter cover"	---
Left/right rear reflector	---

2. "Front attachment, carbon" parts list G30/G31

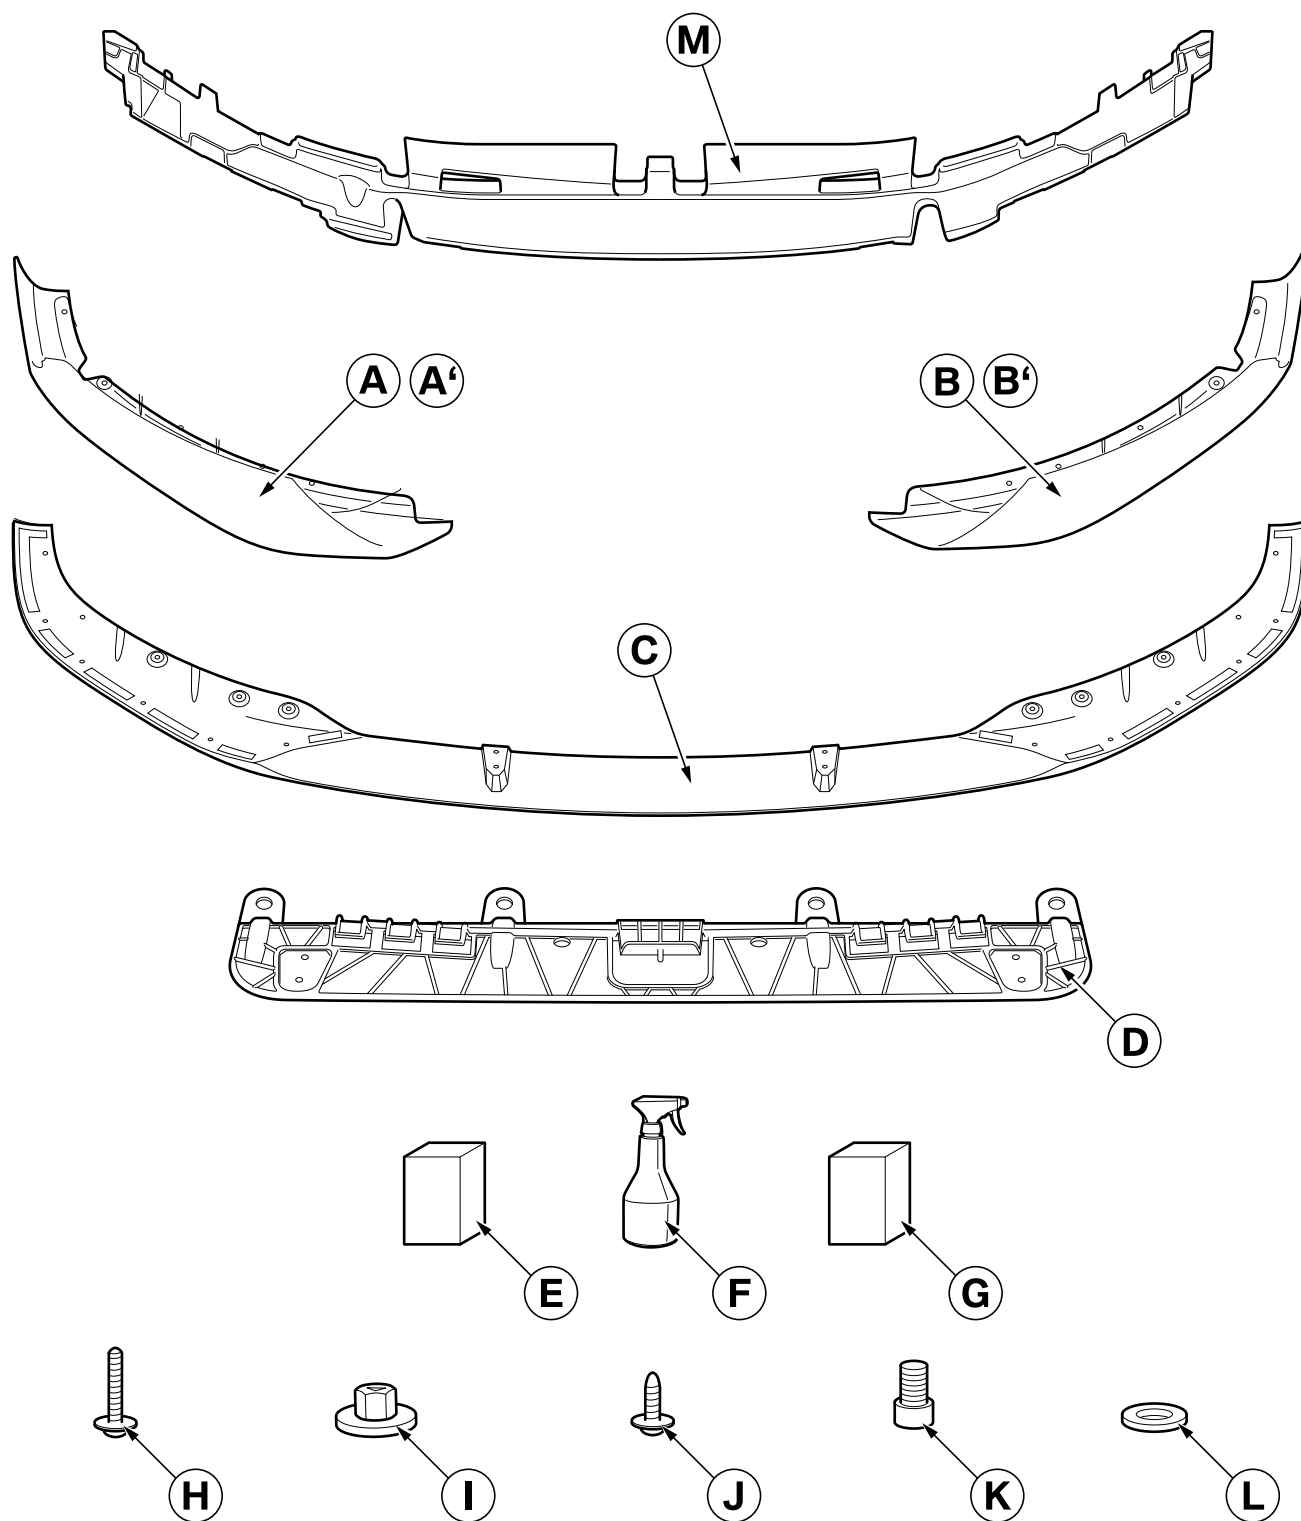


G30 0367 M

2. "Front attachment, carbon" parts list G30/G31

Legend

		"Carbon front add-on section left/right" Quantity included in kit 51 19 2 414 137	"Carbon front add-on section" Quantity included in kit 51 19 2 414 139	"Front attachment, carbon" Quantity included in kit 51 19 2 444 510	BMW part number
A	Right front attachment, carbon G30/G31	1	---	---	51 11 2 414 132
A'	Right front attachment, carbon G30/G31 MPA	---	---	1	51 11 2 444 532
B	Left front attachment, carbon G30/G31	1	---	---	51 11 2 414 131
B'	Left front attachment, carbon G30/G31 MPA	---	---	1	51 11 2 444 533
C	Carbon front add-on section	---	1	---	51 11 2 414 135
D	Front upper adapter	---	1	1	51 11 2 431 033
E	Liquid adhesive (not included in kit, see EPC for details)	---	---	---	---
F	Cleaner (not included in kit, see EPC for details)	---	---	---	---
G	Black touch-up stick (not included in kit, see EPC for details)	---	---	---	---
H	Screw	6	4	4	07 12 9 907 535
I	Plastic cap nut with washer	6	---	---	07 14 7 169 847
J	Cross head screw for plastic	---	10	10	07 14 6 959 925
K	M5 Allen screw	---	4	4	---
L	M5 washer	---	4	4	---
M	Upper shock absorber G30/G31 MPA (not included in the parts kit, see EPC for details)	---	---	---	---

3. "Front attachment, carbon" parts list F90

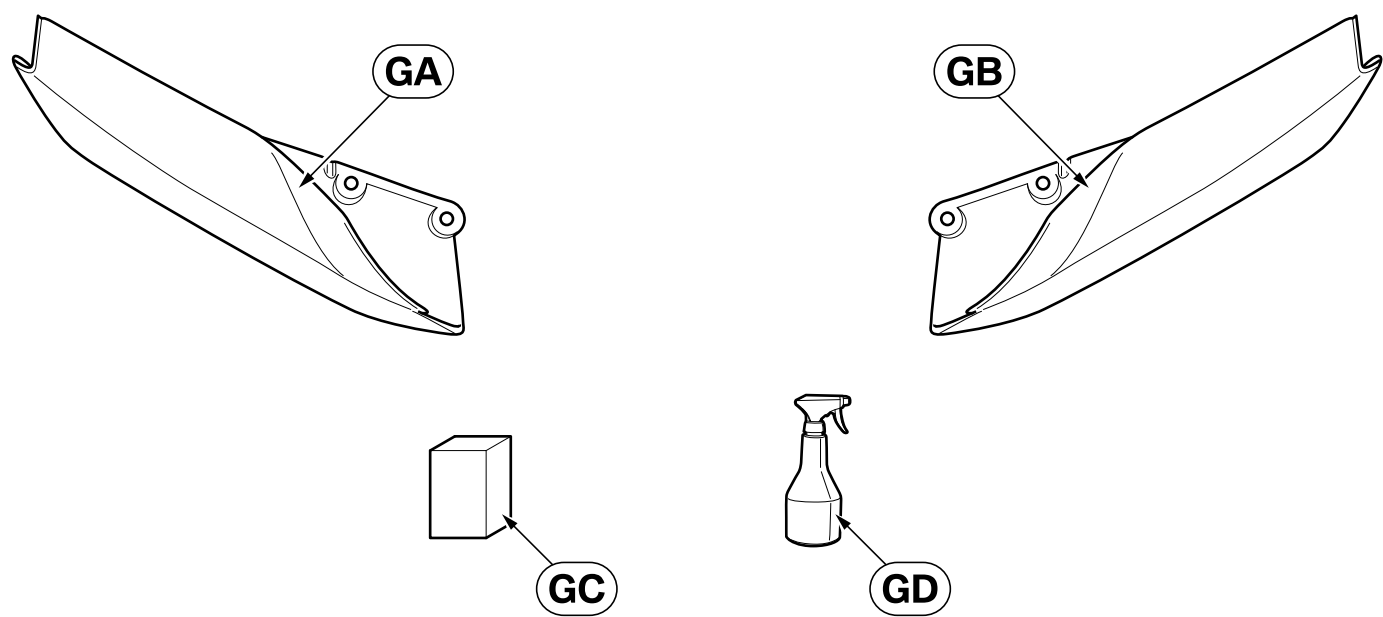


F90 0335 M

Legend

		"Left/right front at- tachment, carbon" Quantity included in kit 51 19 2 449 921	BMW part number
GA	Right front attachment, carbon	1	51 11 2 449 922
GB	Left front attachment, carbon	1	51 11 2 449 923
GC	Liquid adhesive (not included in kit, see EPC for details)	---	---
GD	Cleaner (not included in kit, see EPC for details)	---	---

4. "Side skirt attachment in matt black" G30/G31 and "side skirt attachment, carbon" parts list F90

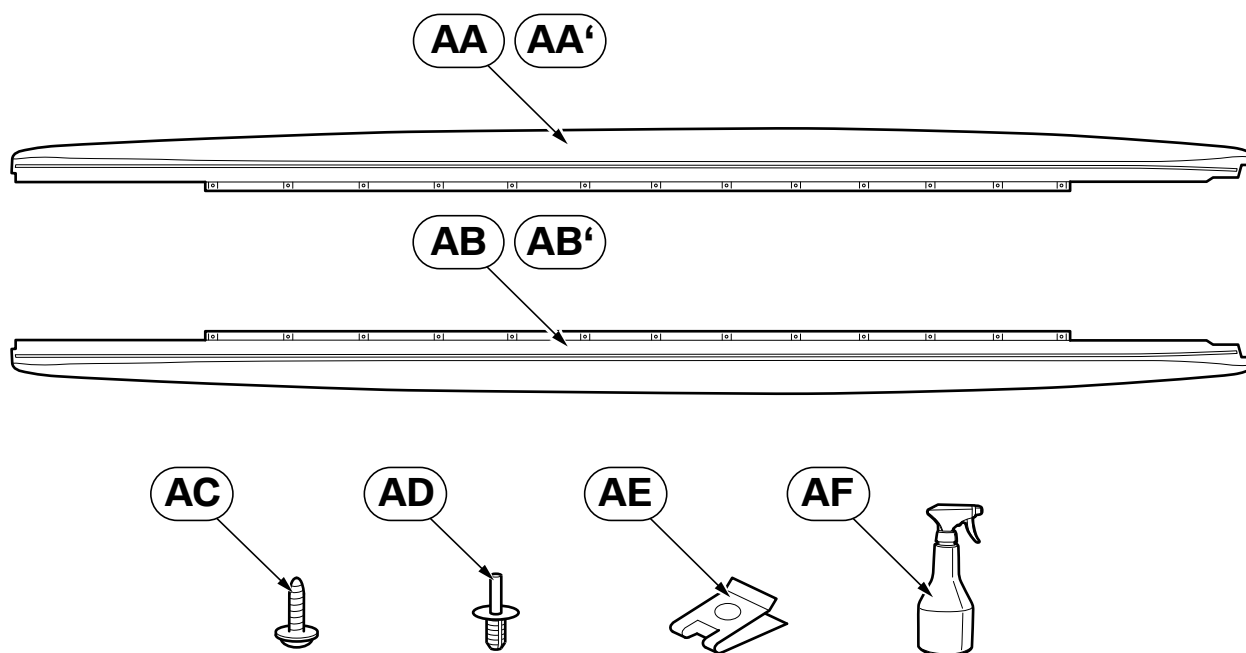


F90 0336 M

Legend

		"Matt black left side sill add-on section" Quantity included in kit 51 19 2 411 019	"Left side skirt attachment, carbon" Quantity included in kit 51 19 2 447 015	"Matt black sill add-on section, right" Quantity included in kit 51 19 2 411 020	"Right side skirt attachment, carbon" Quantity included in kit 51 19 2 447 016	BMW part number
AA	Matt black sill add-on section, right	---	---	1	---	51 77 2 411 018
AA'	Right side skirt attachment, carbon	---	---	---	1	51 77 2 447 020
AB	Matt black sill add-on section, left	1	---	---	---	51 77 2 411 015
AB'	Left side skirt attachment, carbon	---	1	---	---	51 77 2 447 019
AC	Oval-head self-tapping screw	14	14	14	14	07 14 7 133 553
AD	Expanding rivet	18	18	18	18	51 71 7 002 953
AE	Sheet metal nut	1	1	1	1	07 14 9 282 347
AF	Cleaner (not included in kit, see EPC for details)	---	---	---	---	---

5. "Rear spoiler, carbon" parts list G30/F90

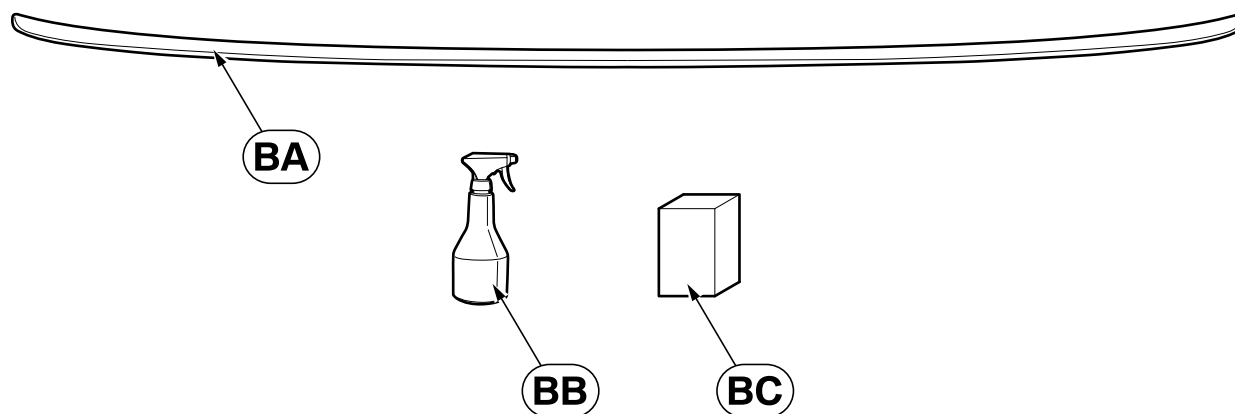


G30 0240 M

Legend

- BA** Carbon rear spoiler
- BB** Cleaner (not included in kit, see EPC for details)
- BC** Liquid adhesive (not included in kit, see EPC for details)

6. "Matt black rear spoiler" parts list G30



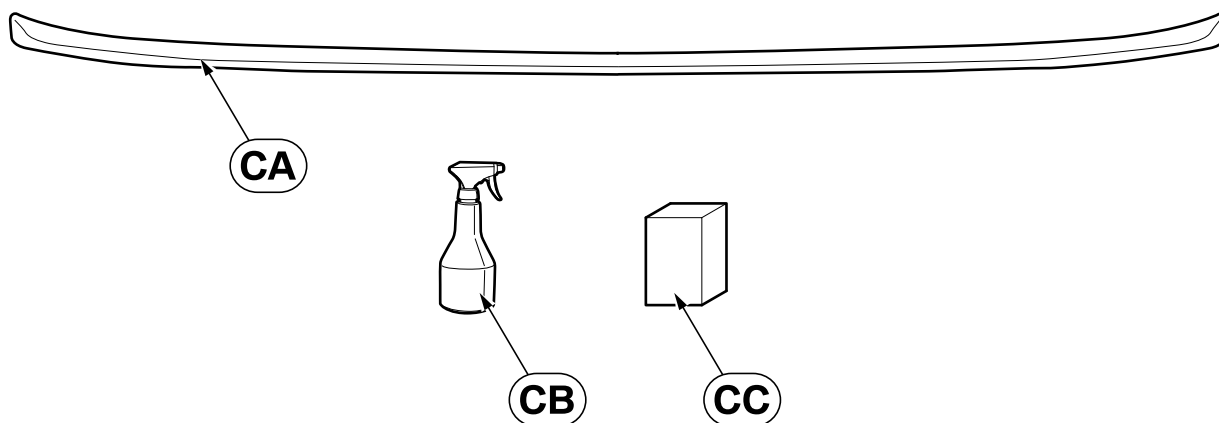


G30 0241 M

Legend

- CA** Matt black rear spoiler
- CB** Cleaner (not included in kit, see EPC for details)
- CC** Liquid adhesive (not included in kit, see EPC for details)

7. "Carbon Pro rear spoiler" parts list G30/F90

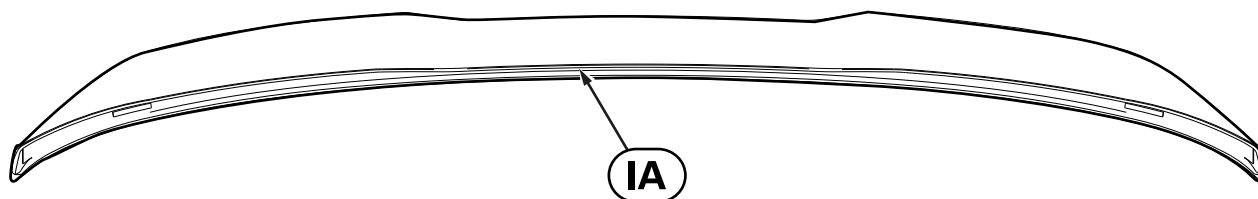


F90 0024 V

Legend

- IA** Carbon Pro rear spoiler
- IB** Cleaner (not included in kit, see EPC for details)
- IC** Liquid adhesive (not included in kit, see EPC for details)

8. "Matt black rear bumper cover" parts list G30/G31

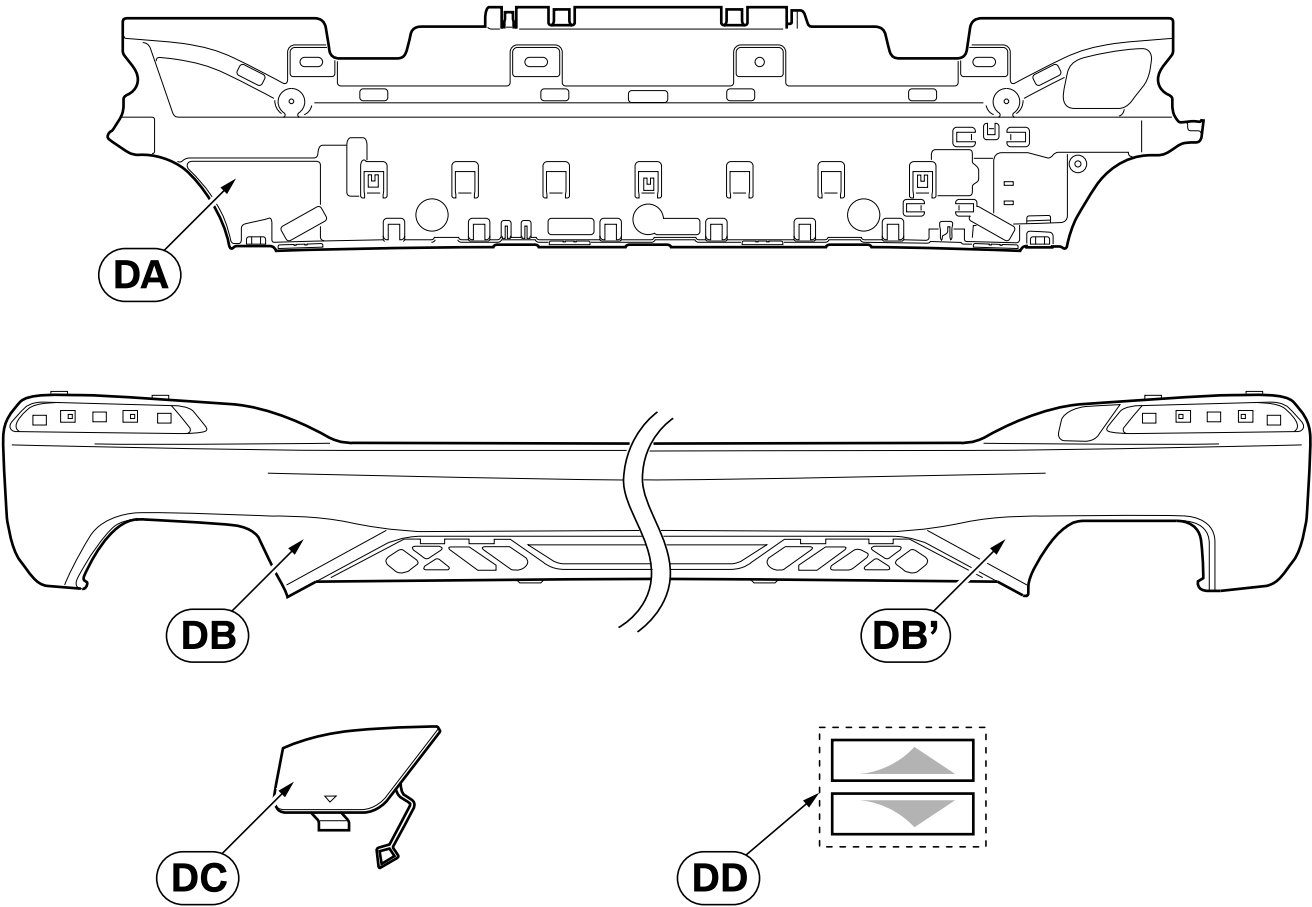


G30 0260 M

Legend

		"Matt black rear bumper cover" Quantity included in kit 51 19 2 412 409 (For information, see EPC)	"Matt black rear bumper cover" Quantity included in kit 51 19 2 412 410 (For information, see EPC)	BMW part number
DA	Exhaust system support adapter cover	1	1	51 12 2 433 186
DB	Matt black rear bumper cover	1	---	51 12 2 414 413
DB'	Matt black rear bumper cover	---	1	51 12 2 414 414
DC	Towing eyelet cover	1	1	51 12 2 412 408
DD	Cutting template (only required for cars with large underfloor trim) – Red template for right-hand side of the car – Blue template for left-hand side of the car	1	1	---

► For the sake of simplicity, all illustrations show the "Matt black rear bumper cover" **DB**, 6-cylinder look. If you are installing the "Matt black rear bumper cover" **DB'** 8-cylinder look, proceed accordingly. ◀

9. "Matt black rear diffuser" parts list G30/G31

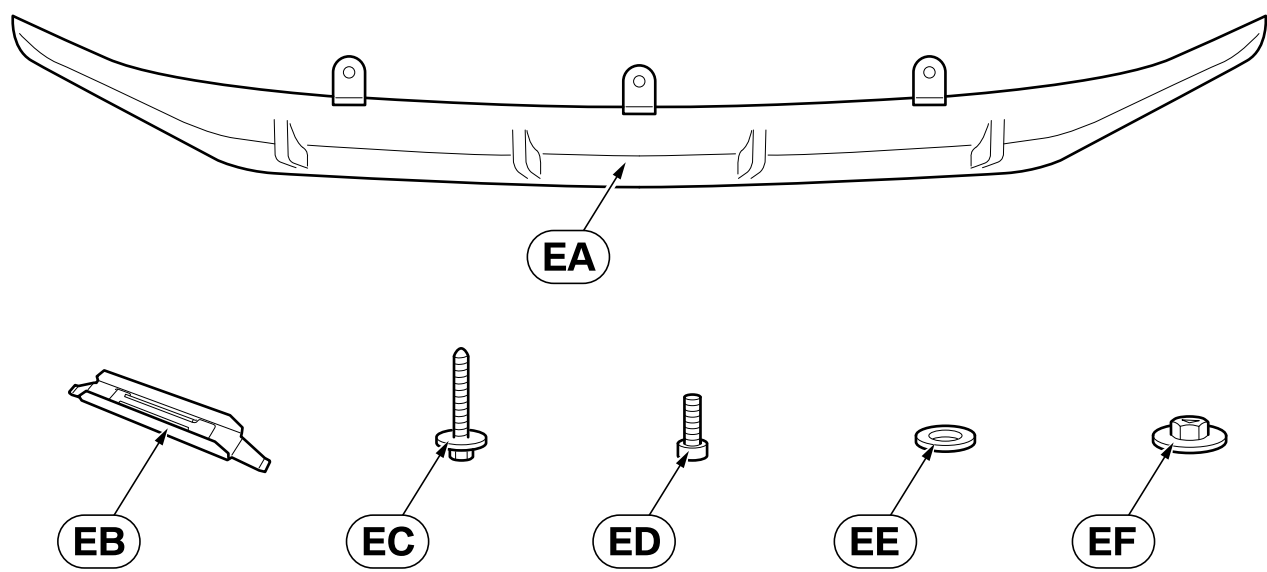


G30 0261 M

Legend

		"Matt black rear diffuser" Quantity included in kit 51 19 2 412 406	BMW part number
EA	Matt black rear diffuser	1	51 12 2 412 411
EB	Clamp	10	07 14 9 241 763
EC	Hexagon screw for plastic	3	07 14 9 110 670
ED	ISA screw with washer	2	07 12 9 905 262
EE	Washer	2	07 11 9 904 206
EF	Hexagon nut with washer	2	51 16 9 157 035


10. "Rear diffuser, carbon" parts list G30/G31

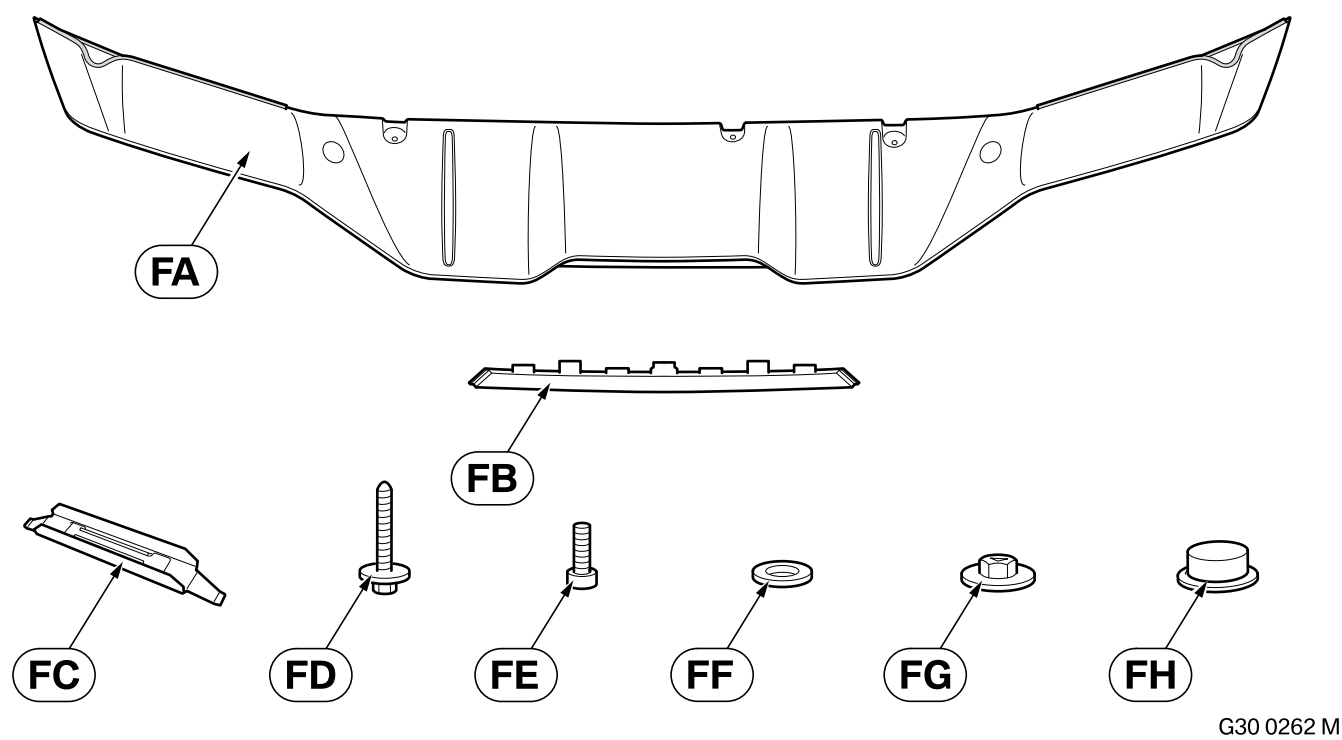

Legend

		"Carbon rear diffuser" Quantity included in kit 51 19 2 412 405	BMW part number
FA	Carbon rear diffuser (including pre-installed edge protector)	1	51 12 2 412 412
FB	Matt black rear side scuttle	1	51 12 2 412 407
FC	Clamp	15	07 14 9 241 763
FD	Hexagon screw	2	07 14 9 213 164
FE	ISA screw with washer	2	07 12 9 905 262
FF	Washer	2	07 11 9 904 206
FG	Hexagon nut with washer	2	51 16 9 157 035
FH	Sealing bung Ø 25.5 mm	2	---

11. "Rear diffuser, carbon" parts list F90

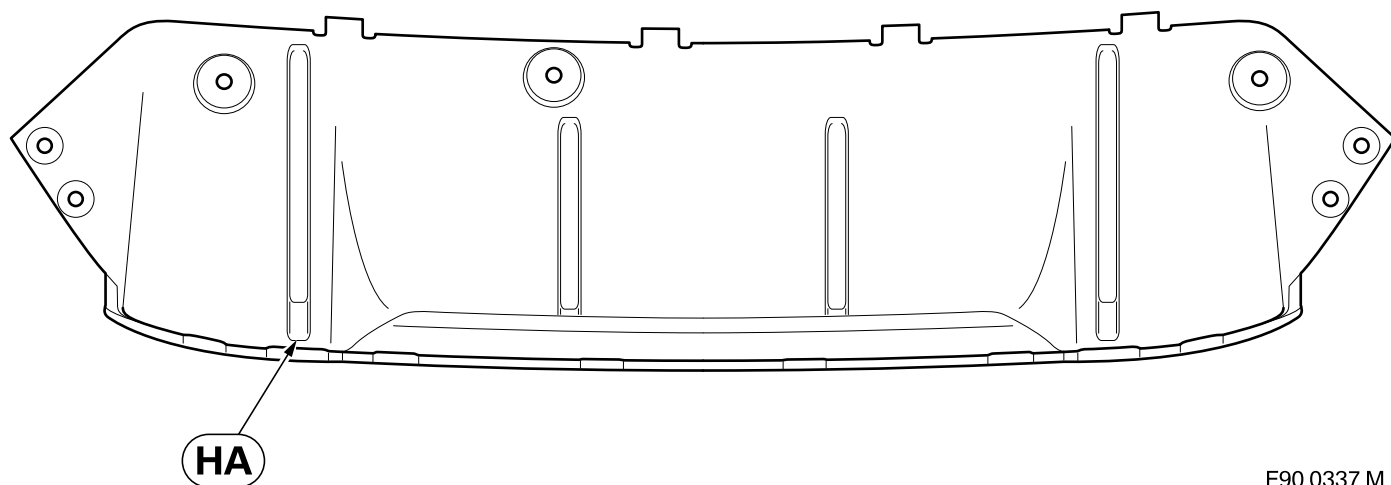


Legend

HA Rear diffuser, carbon

12. Installing the "right/left front attachment, carbon" G30/G31

☐ All the illustration show the installation of the "Carbon front attachment, right" **A**. Proceed accordingly for installing the "Carbon front attachment, left" **B**, **B'** and "Carbon front attachment, right" **A'**. ◀

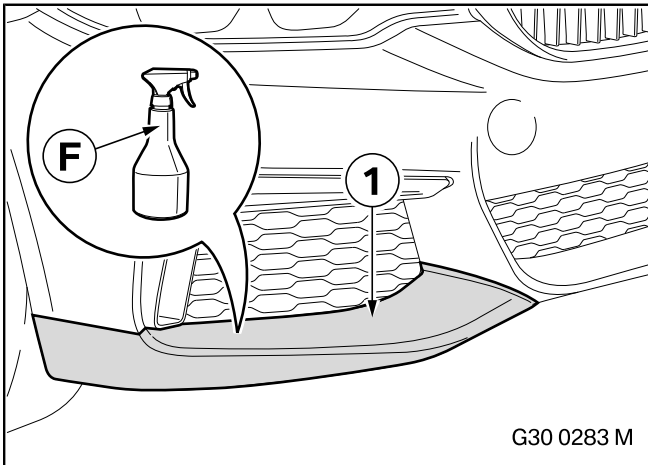


For 550i and 550d cars only:

Remove "upper shock absorber" according to **ISTA/AIR** and install the new "upper shock absorber" according to **ISTA/AIR**.

For all cars:

☐ The bonding surfaces must be completely dry, clean and free from wax or grease. ◀


Clean the surface (1) of the car with cleaner **F** (not included in parts kit, see EPC for further details).

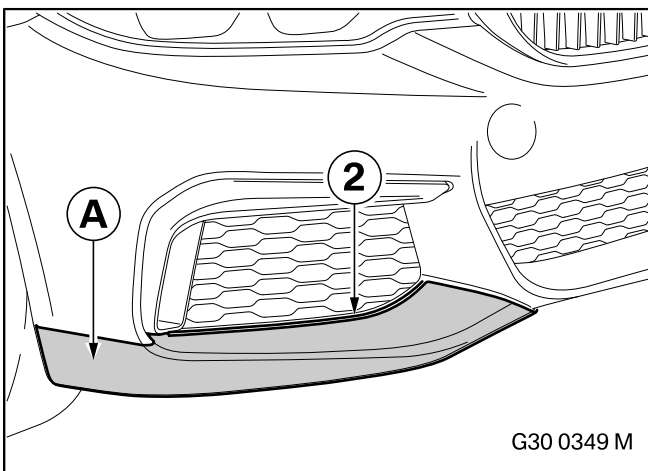

For light paint colours only:

Position the "right front add-on section, carbon" **A**, align it and draw a mark on the inside (2) using a suitable tool.


Remove the "right front add-on section, carbon" **A**.

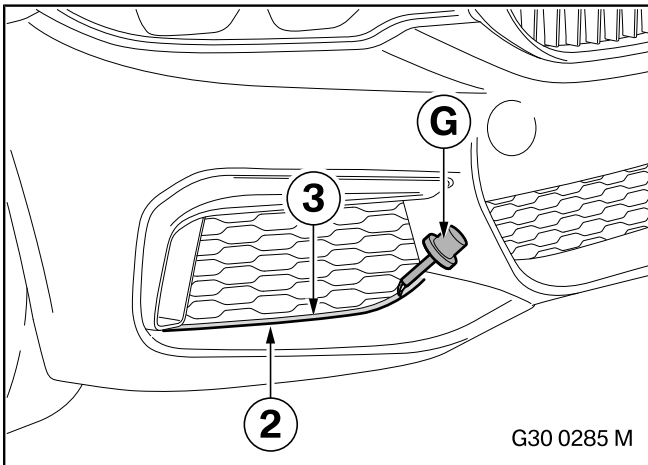

For light paint colours only:

Coat the surface (3) between the mark (2) and the grille with "Black touch-up pen" **G**.


12. Installing the "right/left front attachment, carbon" G30/G31

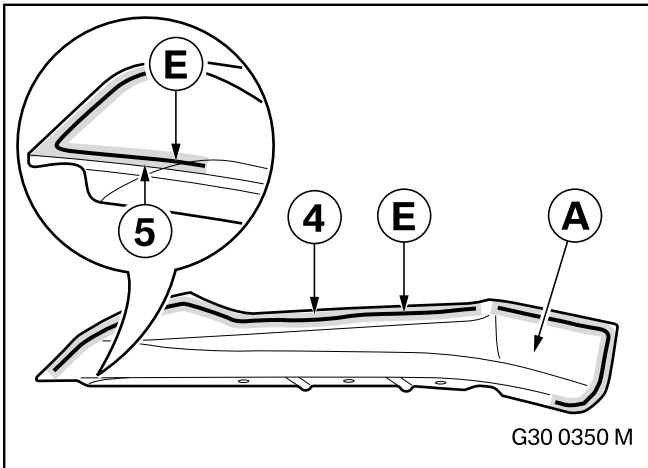

► The bonding surfaces must be completely dry, clean and free from wax or grease. ◀


Sand and clean the surfaces (4) and (5) on the "Carbon front attachment, right" **A** using suitable tools.

Apply an adequate quantity of liquid adhesive **E**, as shown in the form of a bead, **generously** to the "right front add-on section, carbon" **A**.

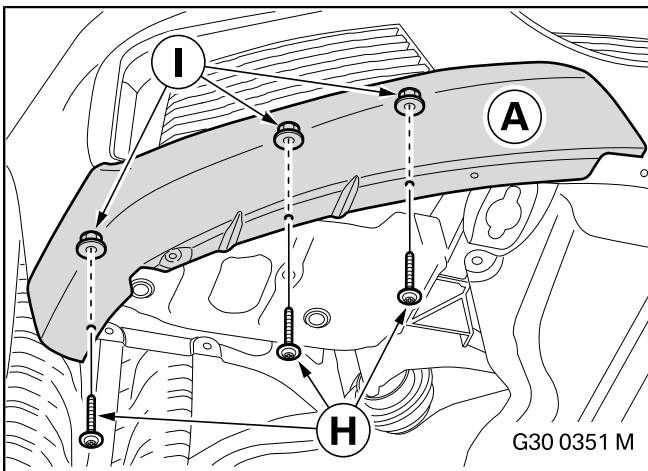

► Remove any excess liquid adhesive **E** immediately. ◀

Position the "right front add-on section, carbon" **A**, align it, press it into place and secure it with screws **H** and plastic cap nuts with washers **I**.

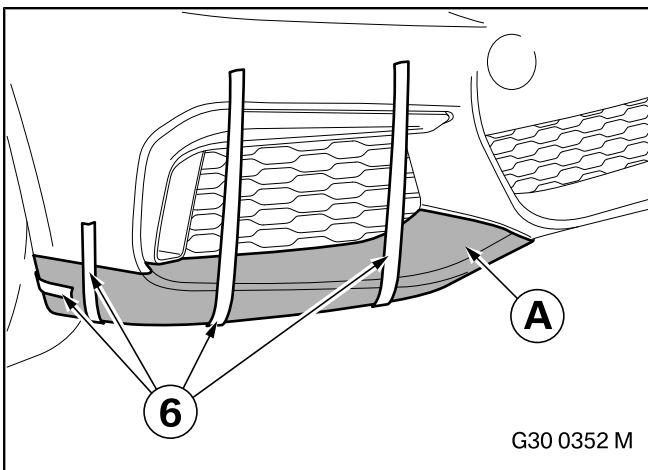

► Ensure that the gaps are uniform. ◀

Fix the "right front add-on section, carbon" **A** with adhesive tape (6) so that the gaps are uniform.


The adhesive tapes (6) can be removed at the earliest after 6 hours.

► Skip this step if the "front attachment, carbon" **C** is to be installed in addition to the "right front attachment, carbon" **A** and "left front attachment, carbon" **B**. ◀

Fit the air guide as described in **ISTA/AIR**.

13. Installing the "front attachment, carbon" G30/G31


- All the illustrations show the installation of the "Carbon front attachment" **C** for the G30/G31.
 Proceed accordingly to install it on 550i and 550d cars. ◀

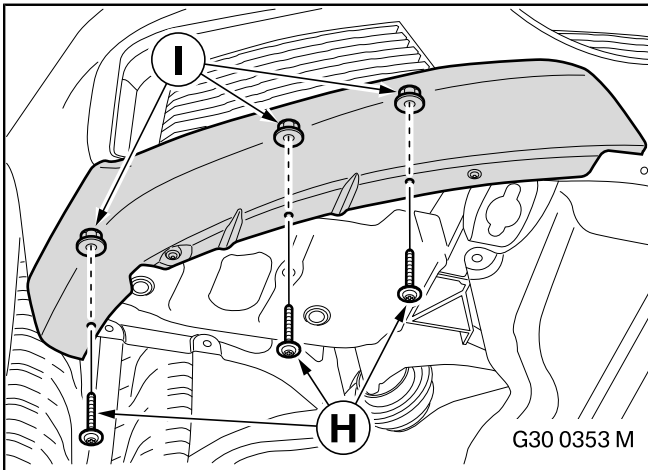

- ⚠ If the "right front attachment, carbon" **A** and "left front attachment, carbon" **B** have already been installed, wait for the curing time for the liquid adhesive **E** of 6 hours. ◀

Remove the air guide and "front engine shield" as described in **ISTA/AIR**.


Remove screws **H** and plastic cap nuts with washer **I**.

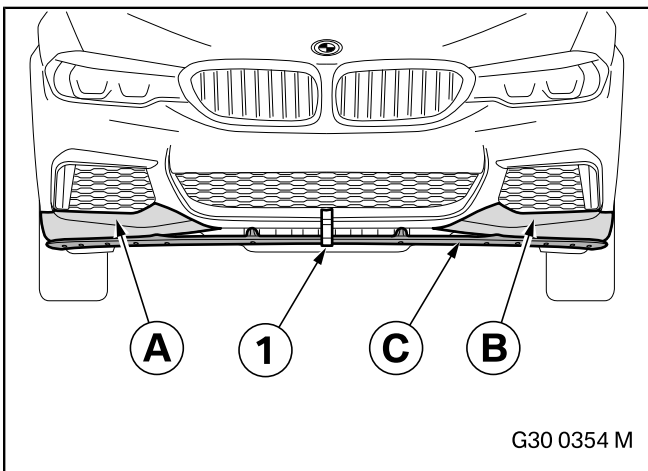

- A second person is required for this work. ◀

Position the "front attachment, carbon" **C** and centre it. Ensure that the gaps to the "right front attachment, carbon" **A** and "left front attachment, carbon" **B** are uniform.


Secure the "Carbon front add-on section" **C** in the centre with adhesive tape (1).

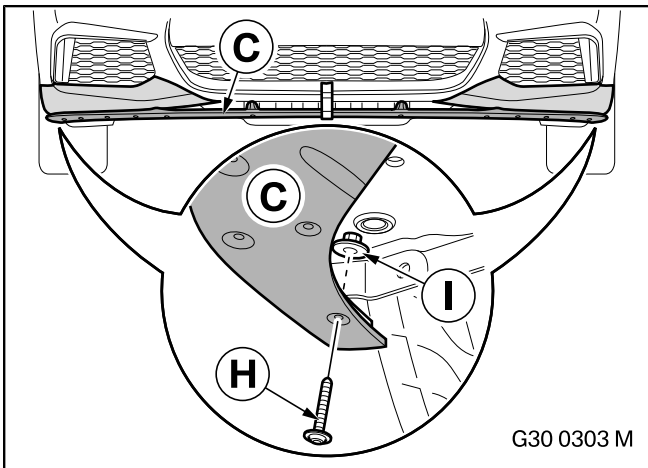

- A second person is required for this work. ◀


Secure the "Carbon front add-on section" **C** with screws **H** and plastic cap nuts with washer **I**.

13. Installing the "front attachment, carbon" G30/G31

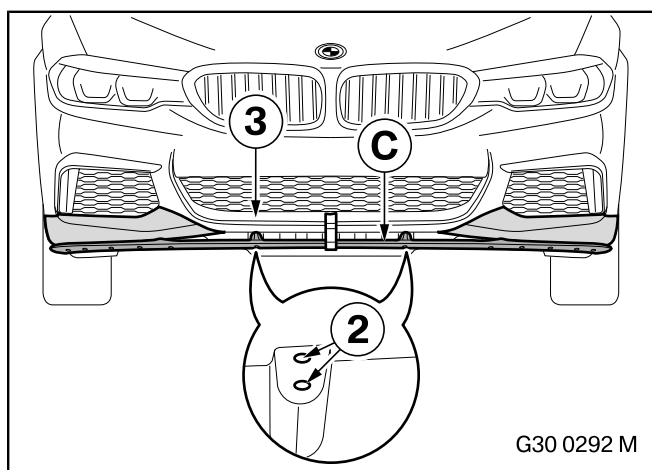


Mark the fastening points (2) for the "Carbon front add-on section" **C** on the bumper support (3) using suitable tools (4x).

Remove "Carbon front add-on section" **C**.

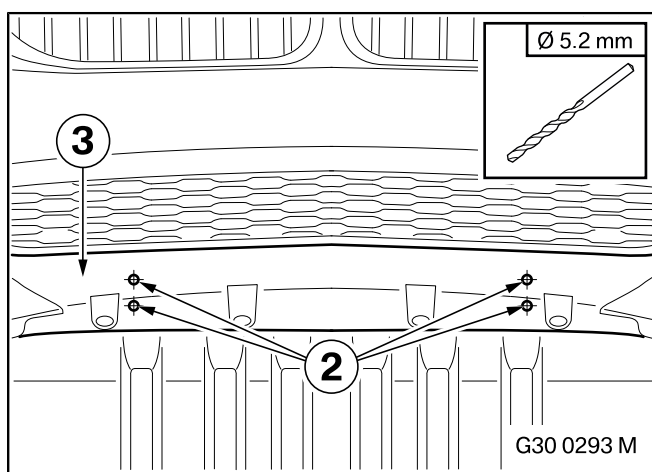


When drilling down to the drill depth, take care not to damage parts underneath. ◀

Use a Ø 5.2 mm drill bit to drill the fastening points (2) in the bumper support (3).

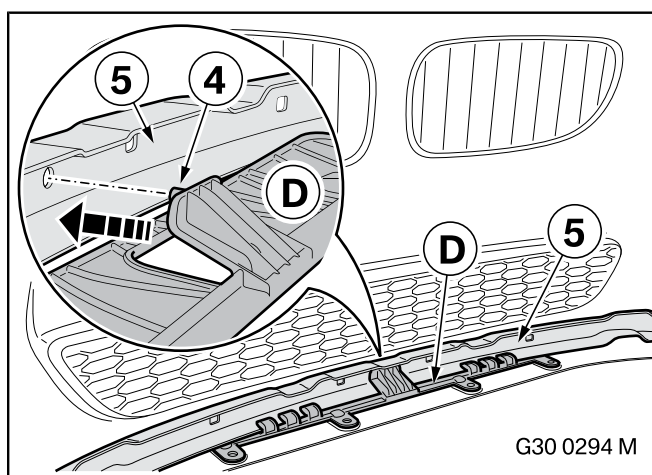


Insert the "Adapter front top" **D** with bolt (4) in the direction indicated by the arrow in the cross member (5).

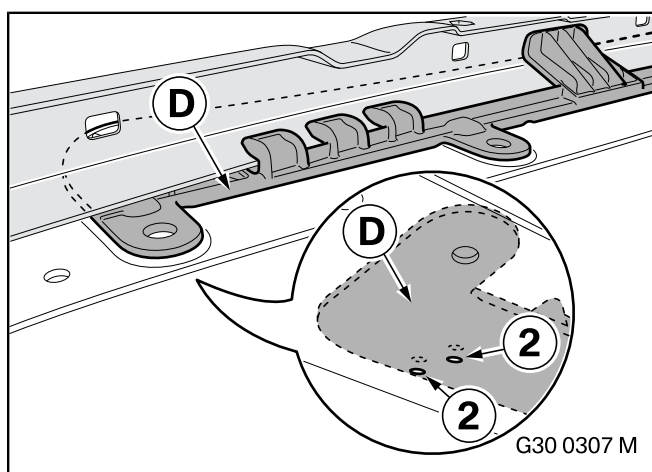


Align the "Adapter front top" **D** with the fastening points (2).


13. Installing the "front attachment, carbon" G30/G31

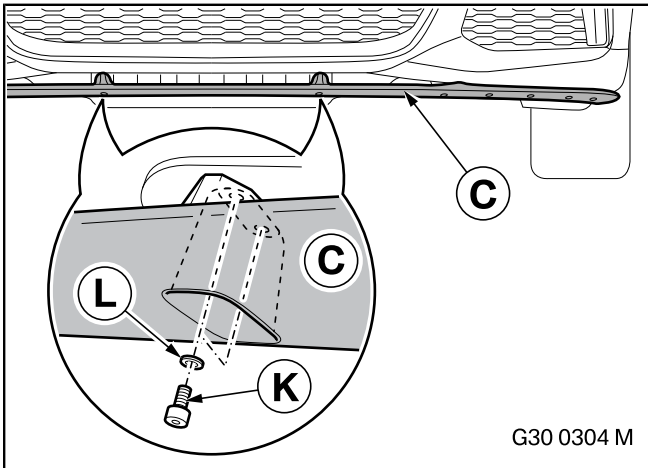

Install the "Carbon front add-on section" **C** using Alan screws **K** and washers **L**.

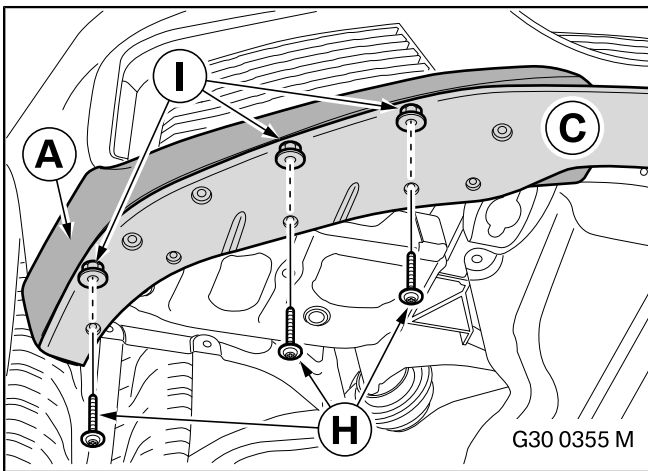


Align the "front attachment, carbon" **C** and install it with screws **H** and plastic cap nuts with washers **I**. Ensure that the gaps to the "right front attachment, carbon" **A** and "left front attachment, carbon" **B** are uniform.

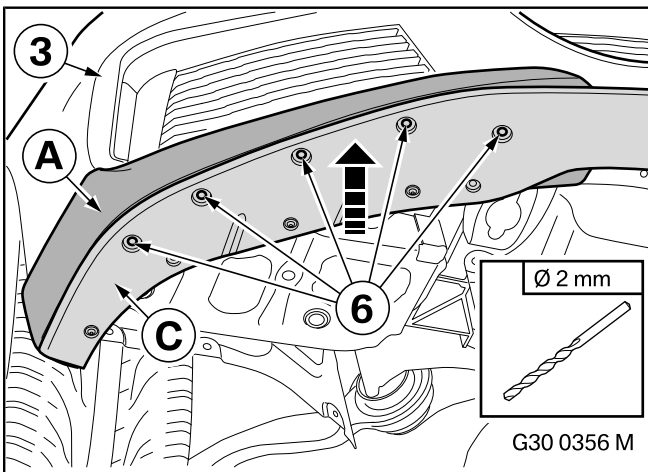

⚠ The holes must be drilled through the "right front attachment, carbon" **A**, "left front attachment, carbon" **B** and the bumper support (3). When drilling down to the drill depth, take care not to damage parts underneath. ◀


Press "Carbon front add-on section" **C** into place.
Use a Ø 2 mm drill bit to drill the fastening points (6).

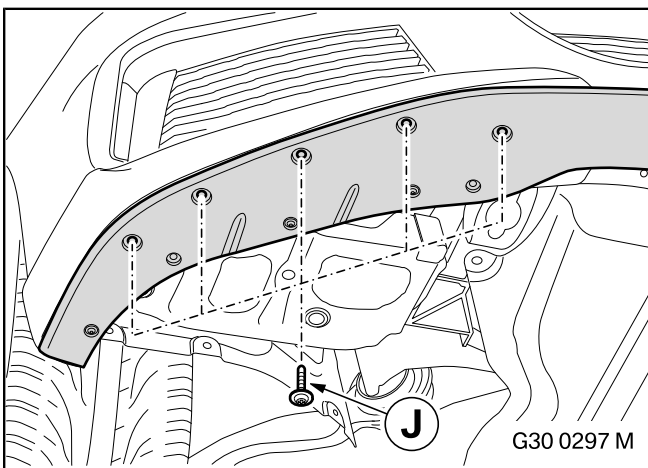

⚠ Use the specified torque during the installation process. ◀

Tighten the cross head screws for plastic **J** to a torque of 5 Nm.

13. Installing the "front attachment, carbon" G30/G31

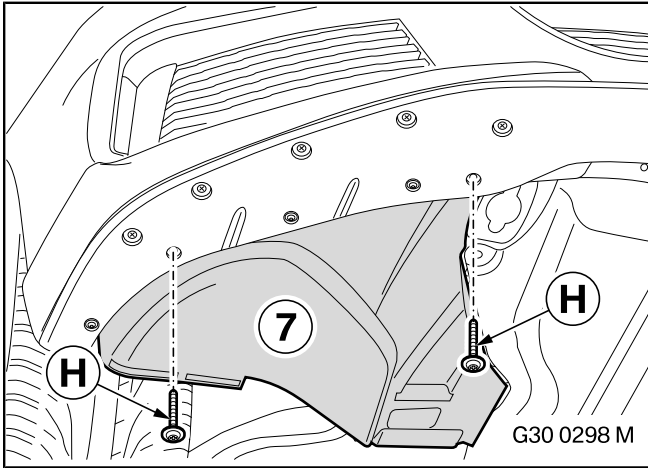


Install the air guide (7) with screws **H**.

Install the remaining screw connections for the air guide (7) as described in **ISTA/AIR**.

Install the "front engine shield" as described in **ISTA/AIR**.

Re-installation only (for example in the event of a repair)

- ▶ In the event of re-installation, bond the "right front attachment, carbon" **A** and "left front attachment, carbon" **B** to the "front attachment, carbon" **C**.
Proceed accordingly to install it on 550i and 550d cars. ◀

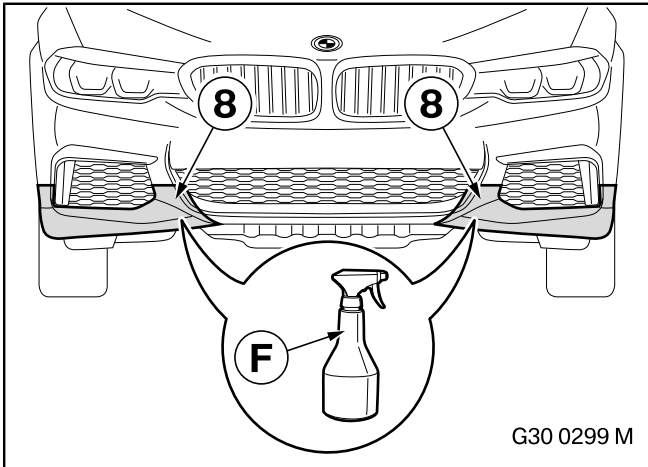


Remove the air guide and "front engine shield" as described in **ISTA/AIR**.

Remove the damaged "Carbon front add-on section" **C**.

- ▶ The bonding surfaces must be completely dry, clean and free from wax or grease. ◀

Clean the surfaces (8) of the car with cleaner **F** (not included in parts kit, see EPC for further details).

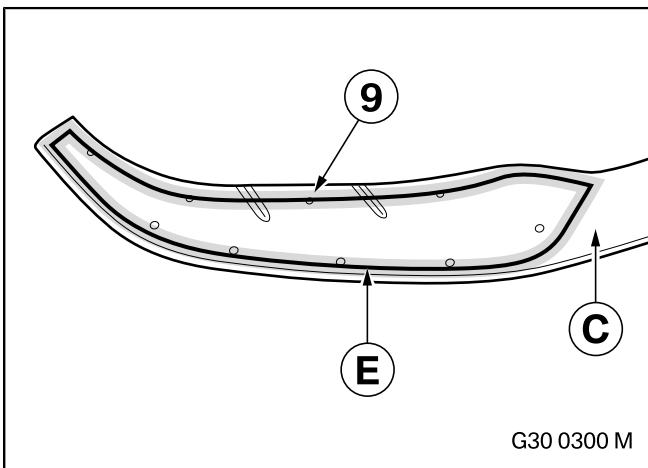


- ▶ The bonding surfaces must be completely dry, clean and free from wax or grease. ◀

Sand and clean surface (9) on "Carbon front add-on section" **C** using suitable products.

Apply an adequate quantity of liquid adhesive **E**, as shown in the form of a bead, **generously** to "Carbon front add-on section" **C**.

13. Installing the "front attachment, carbon" G30/G31

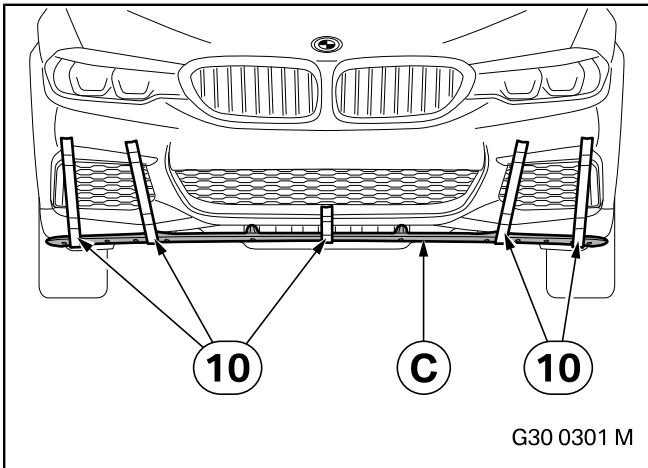


▷ Remove any excess liquid adhesive **E** immediately. ◀


▷ Ensure that the gaps are uniform. ◀

Position, align and press the "Carbon front add-on section" **C** into place and secure it with adhesive tape (10) so that the gaps are uniform.

The adhesive tapes (10) can be removed at the earliest after 6 hours.

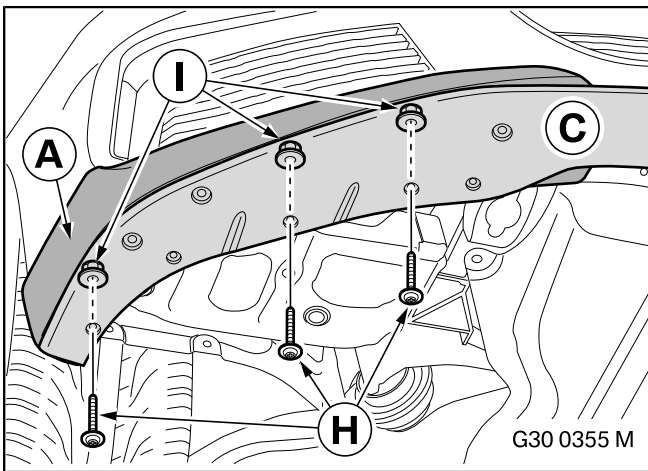


Install the "Carbon front add-on section" **C** with screws **H** and plastic cap nuts with washer **I**.

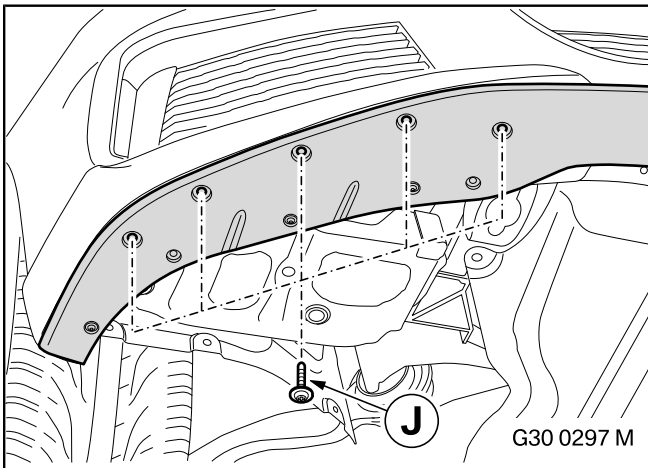

⚠ Use the specified torque during the installation process. ◀

Tighten the cross head screws for plastic **J** to a torque of 5 Nm.

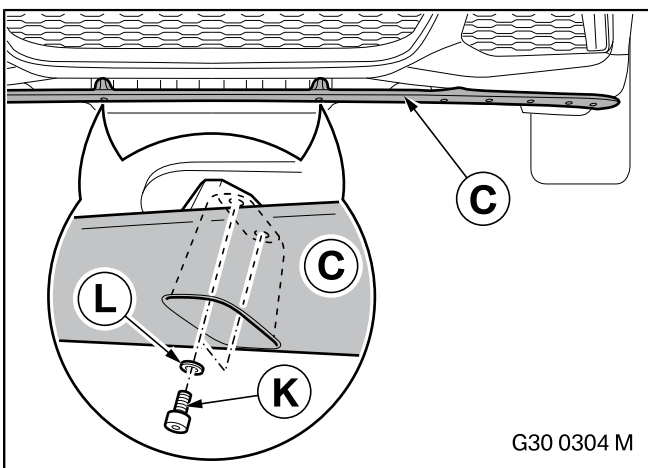


Install the "Carbon front add-on section" **C** using Alan screws **K** and washers **L**.


Install the air guide and "front engine shield" as described in **ISTA/AIR**.

14. Installing the "right/left front attachment, carbon" F90

- All illustrations show the installation of the "left front attachment, carbon" **GB**.
Use the same procedure to install the "right front attachment, carbon" **GA**. ◀

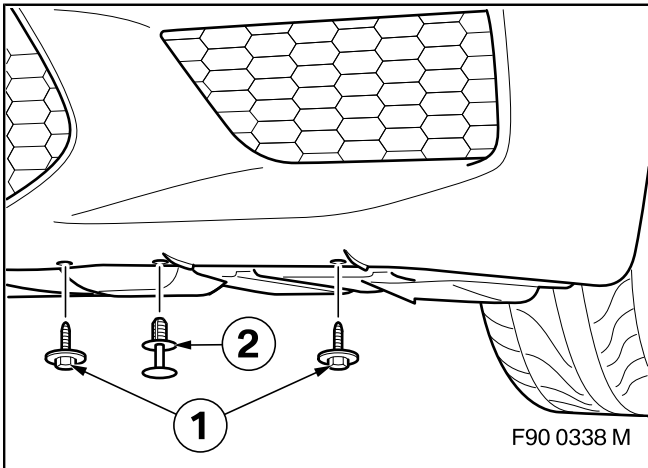


Remove screws (1) and clip (2) as described in **ISTA/AIR**.

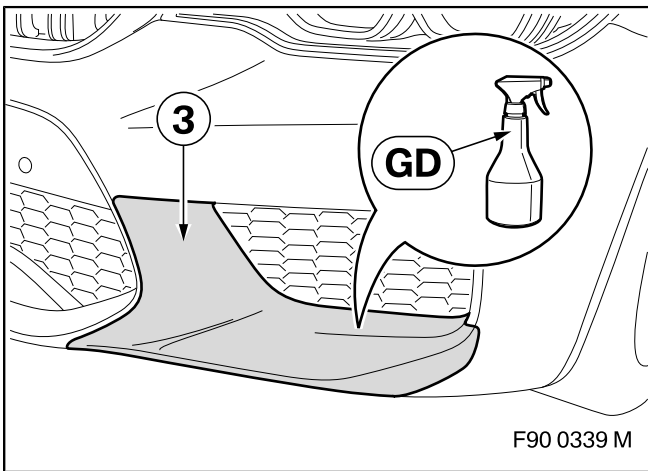

- The bonding surfaces must be completely dry, clean, and free from wax or grease. ◀

Clean the surface (3) of the car with cleaner **GD** (not included in parts kit, see EPC further information).

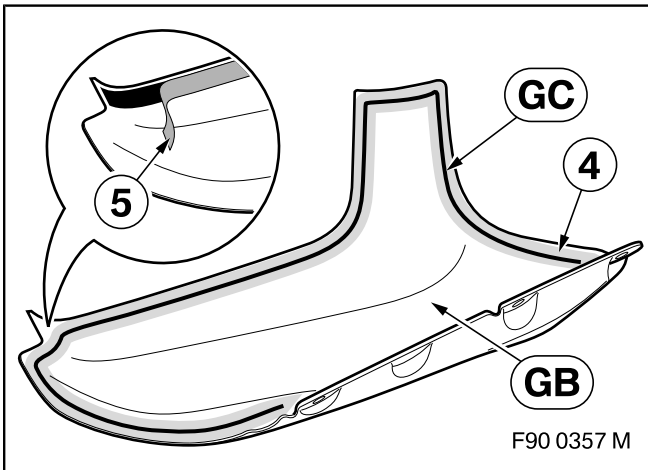


- The bonding surfaces must be completely dry, clean, and free from wax or grease. ◀

Clean the surface (4) of the "left front attachment, carbon" **GB** with cleaner **GD** (not included in parts kit, see EPC further information).

Detach the adhesive backing film (5) on all sections on the "left front attachment, carbon" **GB** a little.

Apply an adequate quantity of liquid adhesive **GC**, as shown in the form of a bead, **generously** to the "left front attachment, carbon" **GB**.

14. Installing the "right/left front attachment, carbon" F90

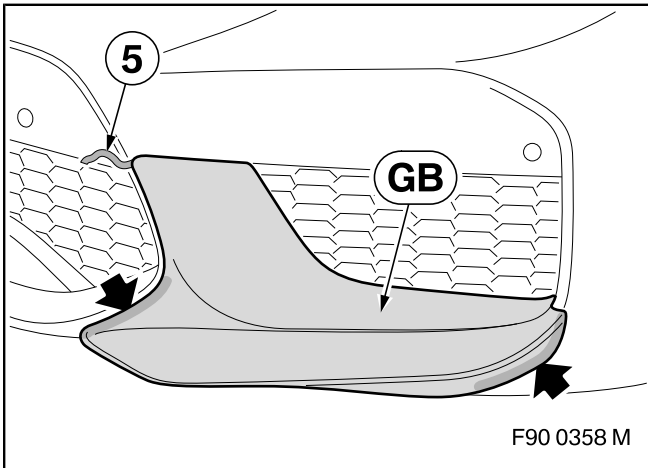


- ▶ Ensure that the detached ends of the adhesive backing films (5) are visible. ◀

Position the "left front attachment, carbon" **GB** and align it.


Remove the adhesive backing film (5) on all sections completely and press the "left front attachment, carbon" **GB** firmly into position.

- ▶ If there is insufficient liquid adhesive **GC** in the marked areas (arrows), it can be pressed into the gap from the outside using the supplied spatula to produce an attractive adhesive joint. ◀

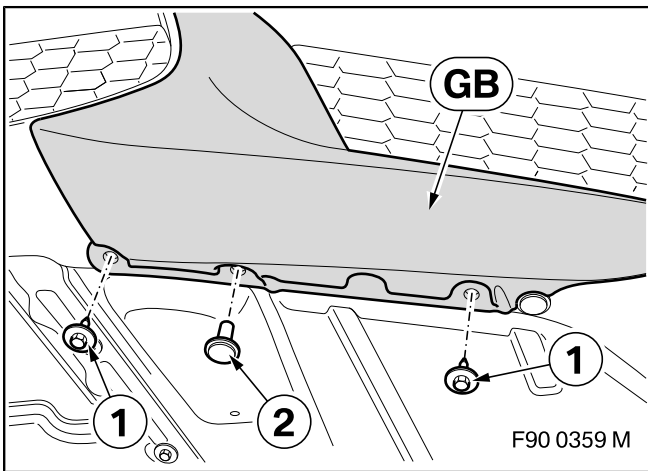

- ▶ Ensure that the gaps are uniform. ◀

Install the "left front attachment, carbon" **GB** using the screws (1) and clip (2) from the standard component.

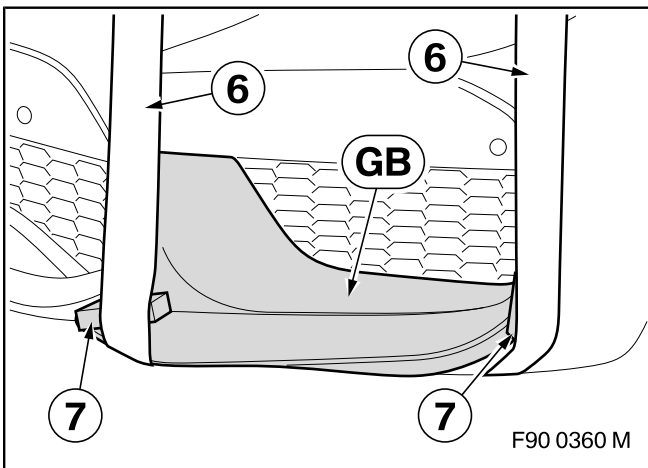


- ▶ Ensure that the gaps are uniform. ◀

- ▶ Remove any excess liquid adhesive **GC** immediately. ◀

Secure the "left front attachment, carbon" **GB** with adhesive tape (6) and foam pieces (7) so that the gaps are uniform.

The adhesive tapes (6) and foam pieces (7) can be removed after 6 hours at the earliest.


15. Installing "side skirt film" G30/G31/F90

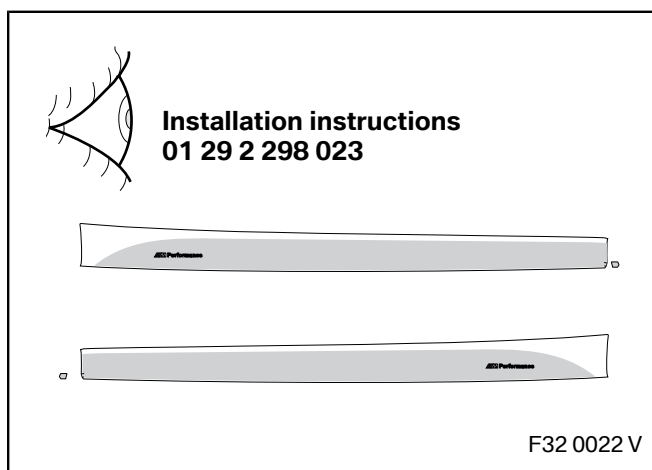

- ▶ Install the "Side sill film" as described in the installation instructions bearing part number 01 29 2 298 023. ◀


16. Installing "side skirt attachment in matt black" G30/G31 and "side skirt attachment, carbon" F90

- ☐ All illustrations show the installation of the "left side skirt attachment, matt black" **AB**.
Use the same procedure to install the "right side skirt attachment, matt black" **AA**, "left side skirt attachment, carbon" **AA'** and "right side skirt attachment, carbon" **AB'**. ◀
- ☐ Ensure that if you are also installing the "side skirt film", it is fixed to the car before you install the "side skirt attachment in matt black" **AA** and **AB**, as well as the "side skirt attachment, carbon" **AA'** and **AB'**. ◀

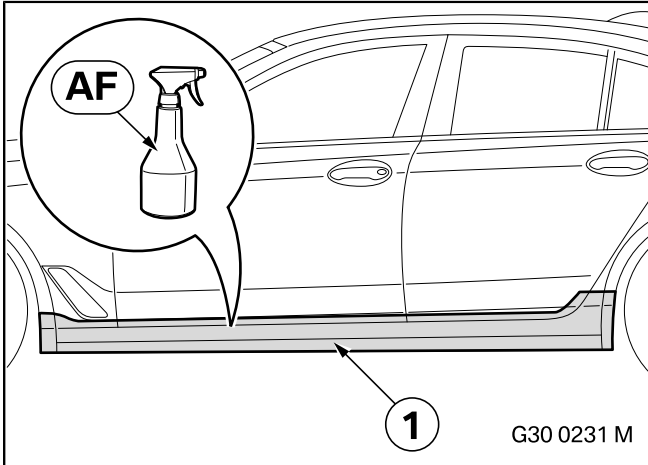


- ☐ The bonding surfaces must be completely dry, clean and free from wax or grease. ◀

Clean the surface (1) of the car with cleaner **AF** (not included in parts kit, see EPC further information).

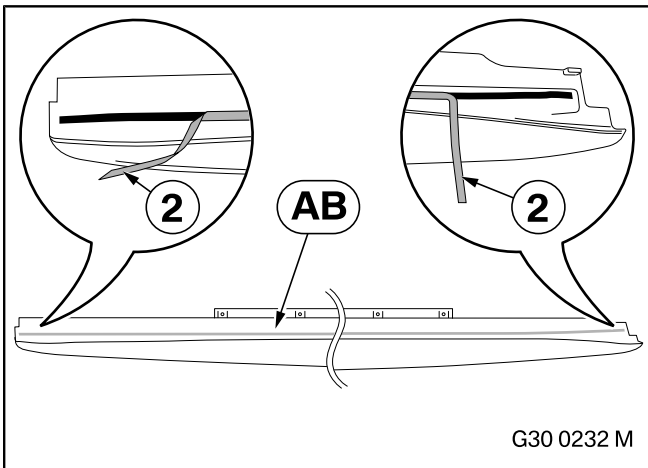

Release a little of the adhesive backing film (2) on both sides of the "Matt black side sill add-on section, left" **AB**.

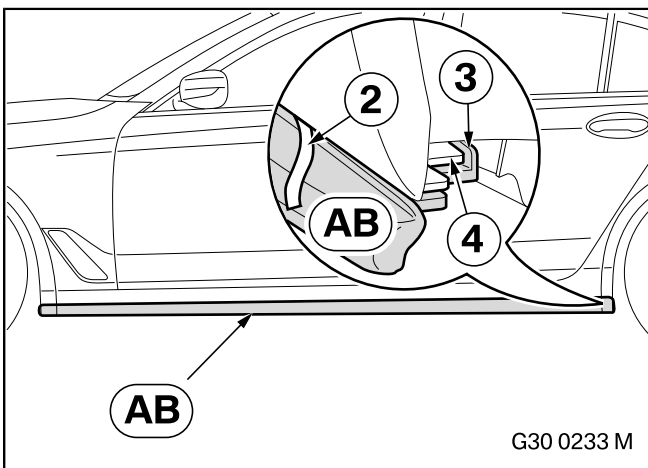


- ☐ Ensure that the released ends of the adhesive backing film (2) are visible. ◀


Position the "Matt black side sill add-on section, left" **AB** so that the stop (3) is behind the edge of the car (4).

Centre the "Matt black left side sill add-on section" **AB**.

16. Installing "side skirt attachment in matt black" G30/G31 and "side skirt attachment, carbon" F90

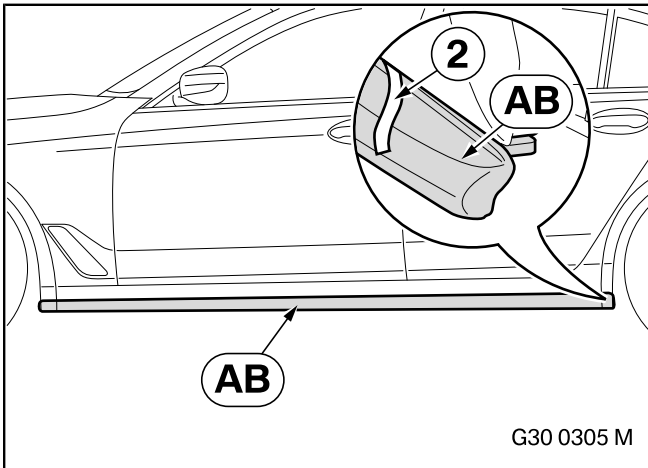


Carefully remove the adhesive backing film (2) from the outside inwards and firmly press on the "Matt black side sill add-on section, left" **AB**.

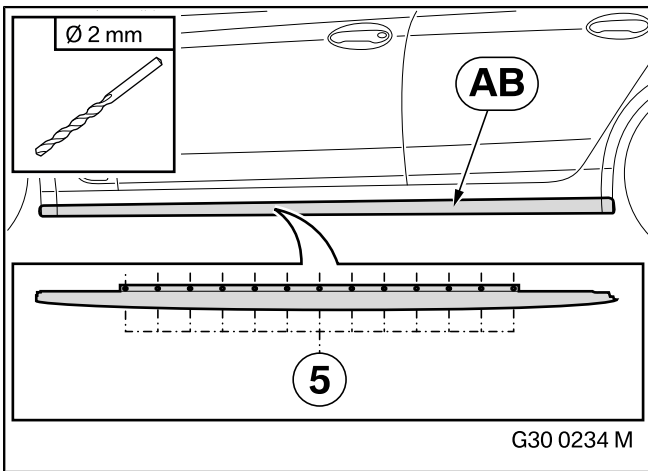


When drilling down to the drill depth, take care not to damage parts underneath. ◀

Use a Ø 2 mm drill bit to mark the 13 holes (5) in the "Matt black side sill add-on section, left" **AB** on the side sill.

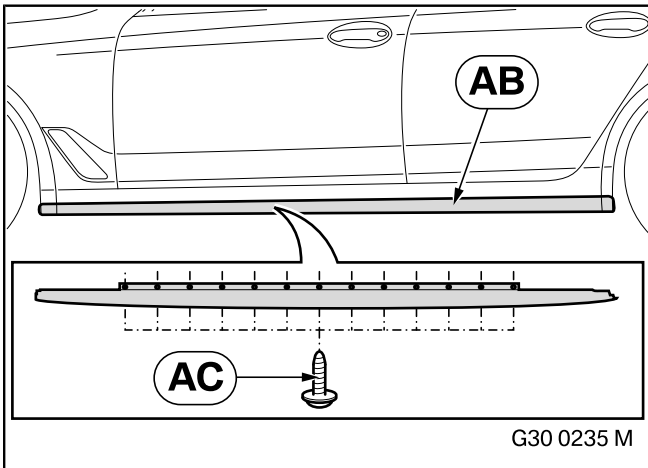

Install the "Matt black side sill add-on section, left" **AB** using oval-head self-tapping screws **AC**.

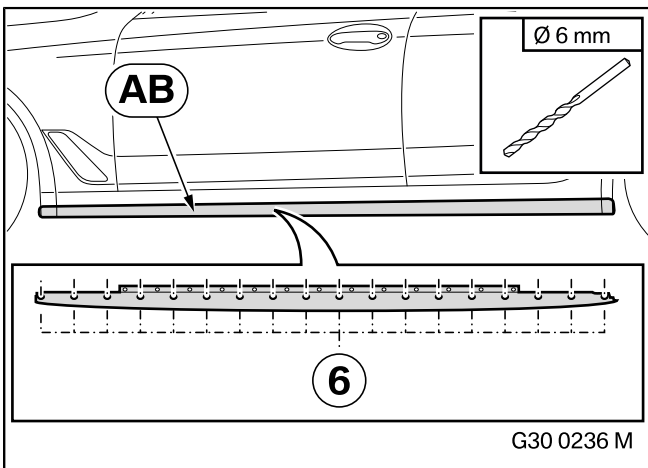

When drilling down to the drill depth, take care not to damage parts underneath. ◀


For "side skirt attachment, matt black" G30/G31 only:

Use a Ø 6 mm drill bit to drill the 18 holes (6) in the "Matt black side sill add-on section, left" **AB** and transfer them to the side sill.

For "side skirt attachment, carbon" F90 only:


Use a Ø 6 mm drill bit to drill the 18 holes (6) in the side skirt.

16. Installing "side skirt attachment in matt black" G30/G31 and "side skirt attachment, carbon" F90

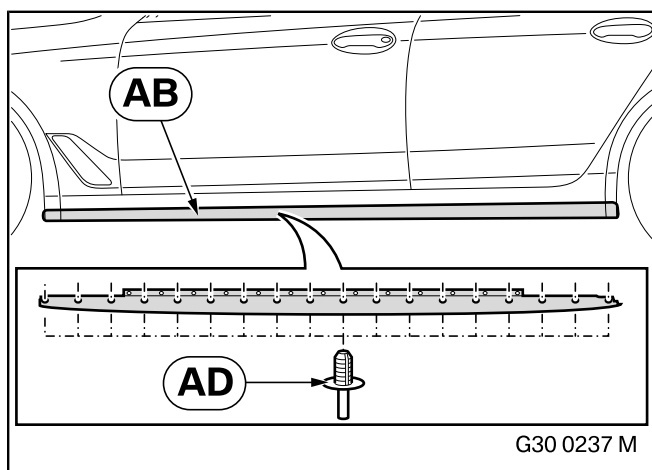

Install the "Matt black side sill add-on section, left" **AB** using expanding rivets **AD**.


Release the "Rear wheel arch trim" a little.

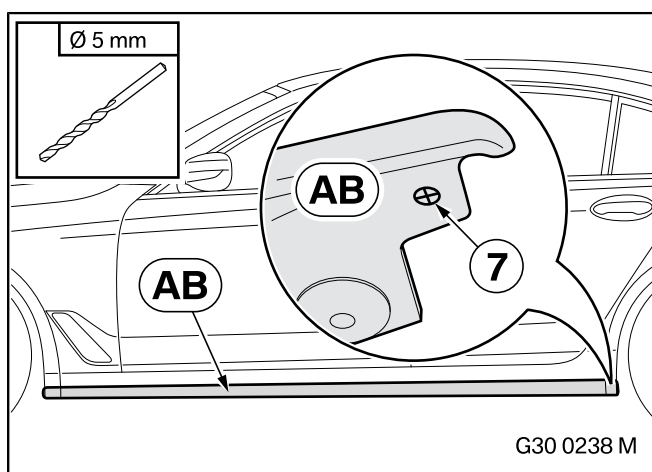

For "side skirt attachment, matt black" G30/G31 only:

When drilling down to the drill depth, take care not to damage parts underneath. ◀


Use a Ø 5 mm drill bit to mark the hole (7) on the mark from "Matt black side sill add-on section, left" **AB** on the side sill.

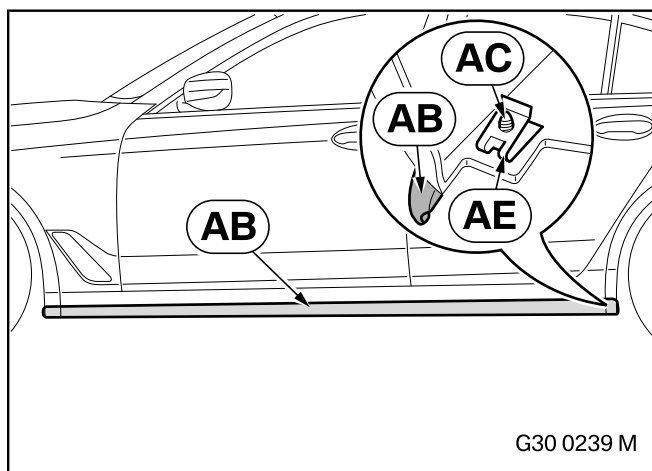

Install sheet metal nut **AE** using oval-head self-tapping screw **AC** on "Matt black side sill add-on section, left" **AB**.

Return the "Rear wheel arch trim" to its original position.


17. Installing the "Carbon rear spoiler" G30/F90

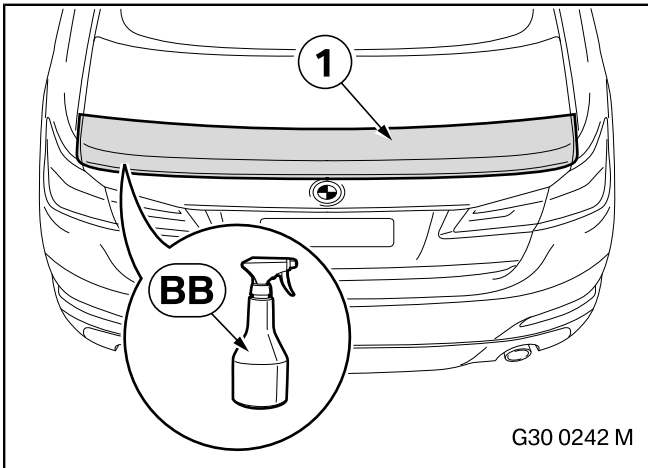


For F90 only:

Remove the standard rear spoiler as described in **ISTA/AIR**.


For all cars:

 The bonding surfaces must be completely dry, clean and free from wax or grease. ◀


Clean the surface (1) of the car with cleaner **BB** (not included in parts kit, see EPC further information).

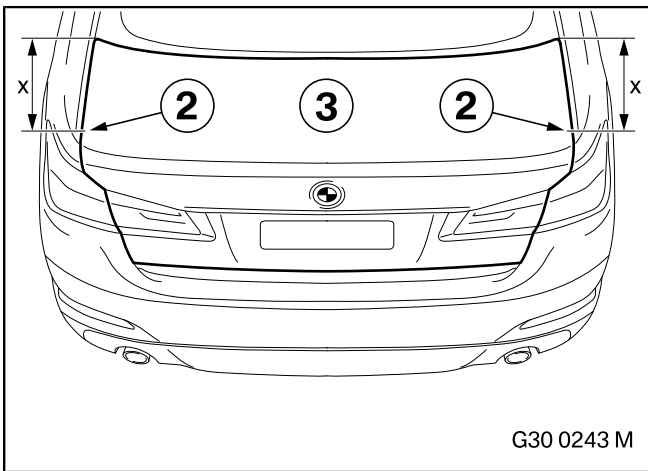

Make a mark (2) with dimension $x = 441$ mm measured from the front corner of the boot lid (3) using suitable tools.

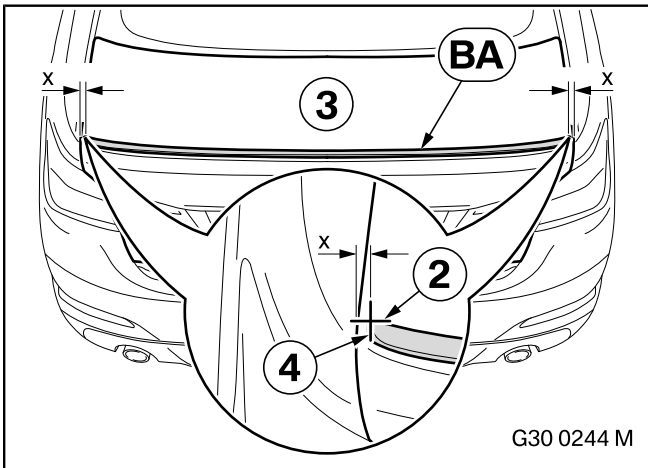


Position the "Carbon rear spoiler" **BA** on the marks (2) you made earlier on the boot lid (3), centre it and mark the position (4) with suitable tools.

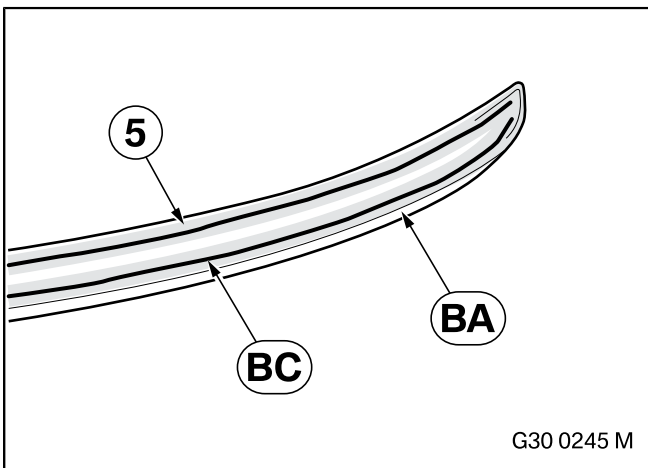

Sand and clean the edge area (5) of the "Carbon rear spoiler" **BA** using suitable products.

Apply an adequate quantity of liquid adhesive **BC**, as shown in the form of a bead, **generously** to "Carbon rear spoiler" **BA**.

17. Installing the "Carbon rear spoiler" G30/F90

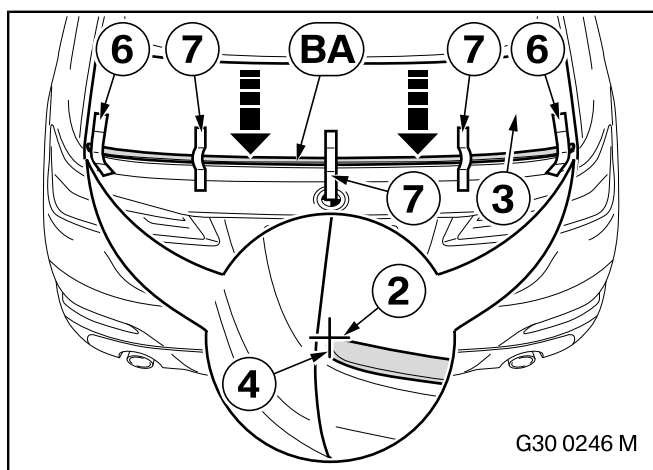

▶ Remove any excess liquid adhesive **BC** immediately. ◀

▶ Ensure that the gaps are uniform. ◀

Position the "Carbon rear spoiler" **BA** between the marks (2) and (4), align it and press it into position.

Secure the "Carbon rear spoiler" **BA** first with the outer adhesive tape (6) and then with the inner adhesive tape (7). Ensure that the gaps are uniform.

The adhesive tape (6) and (7) can be removed after at least 6 hours.


18. Installing the "matt black rear spoiler" G30

Painting instructions

Check that all the parts fit accurately on the car before painting them. Primed parts must be pre-treated accordingly before painting.


The BMW painting instructions must be observed (see ISTA/AIR /99 00 ...).

▶ The "Matt black rear spoiler" **CA** can be partially painted as required by the customer. ◀

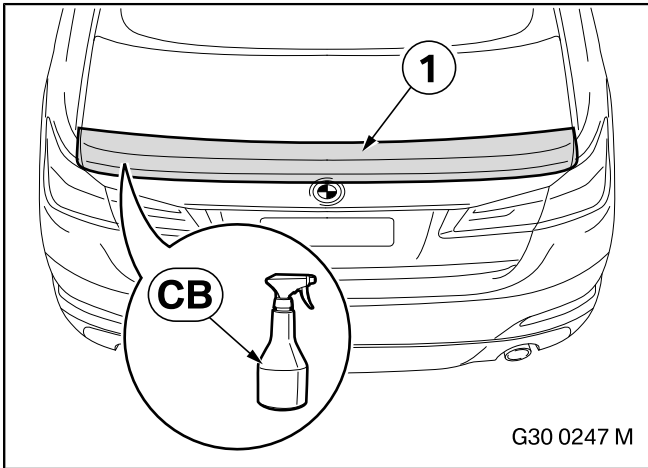


▶ The bonding surfaces must be completely dry, clean and free from wax or grease. ◀

Clean the surface (1) of the car with cleaner **CB** (not included in parts kit, see EPC further information).

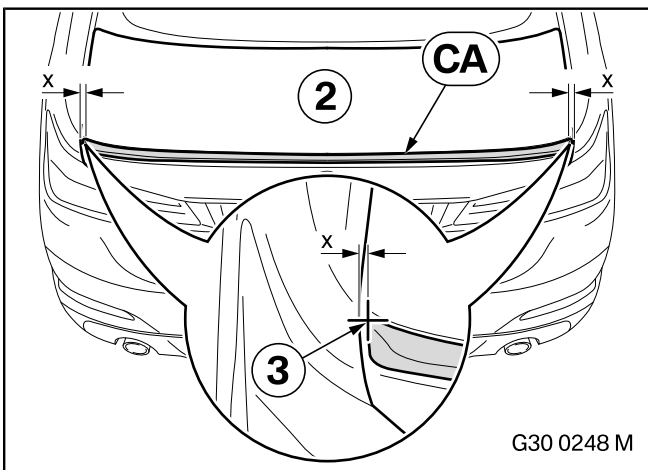


Position the "Matt black rear spoiler" **CA** on the marks (2) you made earlier on the boot lid (2), centre it and mark the position (3) with suitable tools.

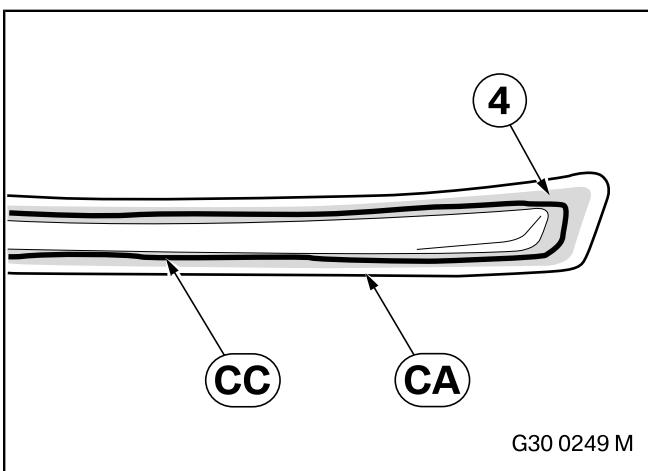

Sand and clean the edge area (4) of the "Matt black rear spoiler" **CA** using suitable products.

Apply an adequate quantity of liquid adhesive **CC**, as shown in the form of a bead, **generously** to "Matt black rear spoiler" **CA**.

18. Installing the "matt black rear spoiler" G30

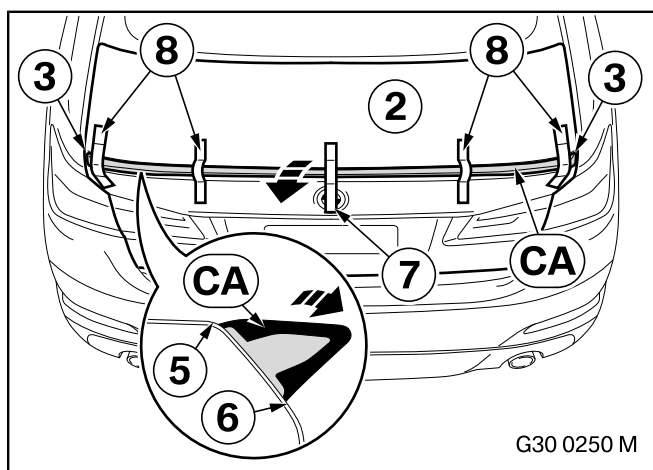

Remove any excess liquid adhesive **CC** immediately. ◀


Position the "Matt black rear spoiler" **CA** between the marks (3) and align it.

Pull the centre of the "Matt black rear spoiler" **CA** to the rear in the direction shown by the arrow until the front gap (5) has closed. Then press the "Matt black rear spoiler" **CA** onto the boot lid (2) so that the bottom gap (6) also closes.

Secure the "Matt black rear spoiler" **CA** first in the centre with adhesive tape (7) and then with the outer adhesive tape (8).


The adhesive tapes (7) and (8) can be removed after 6 hours at the earliest.

19. Install the "Carbon Pro rear spoiler" G30/F90

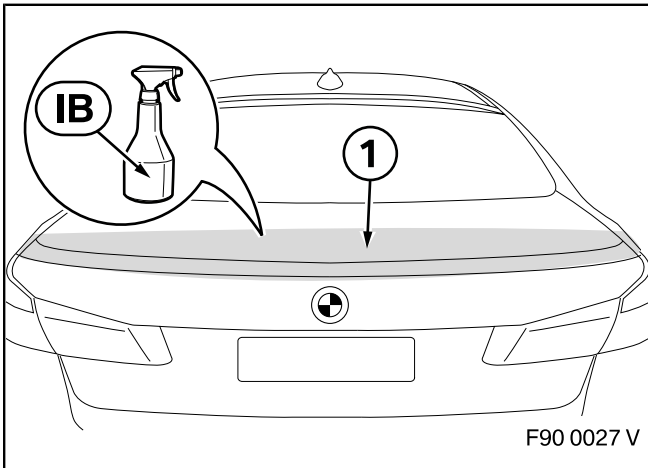


► The bonding surfaces must be completely dry, clean, and free from wax or grease. ◀

Clean the surface (1) of the car with cleaner **IB** (not included in parts kit, see EPC for further details).

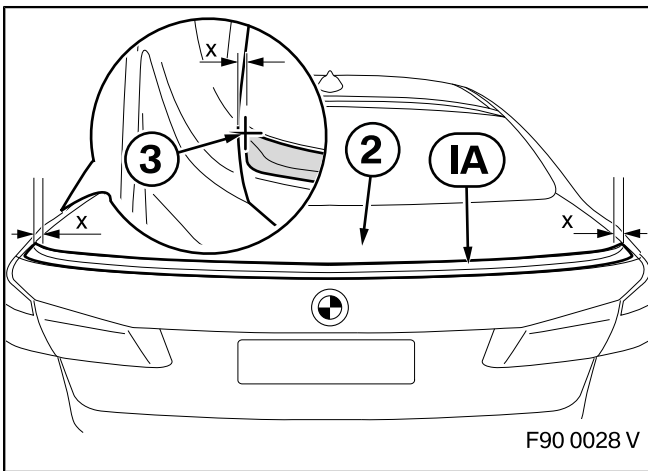


Position the "Carbon Pro rear spoiler" **IA** on the boot lid (2), centre it and mark the position (3) with suitable tools.

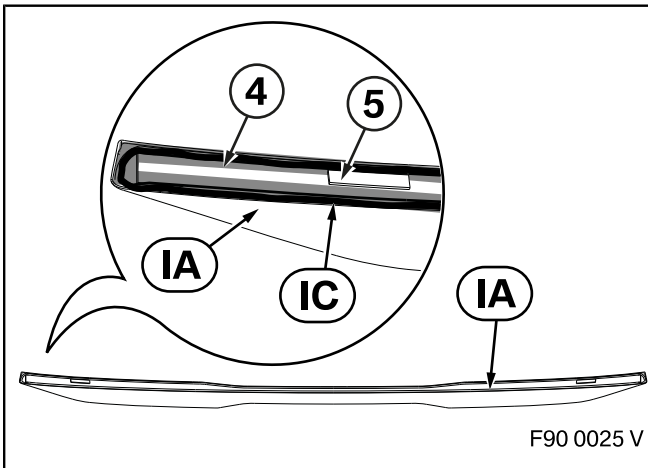

Sand and clean the edge area (4) of the "Carbon Pro rear spoiler" **IA** using suitable tools.

Apply an adequate quantity of liquid adhesive **IC**, as shown in the form of a bead, **generously** to "Carbon Pro rear spoiler" **IA**.

Remove the backing foil (5) in full.

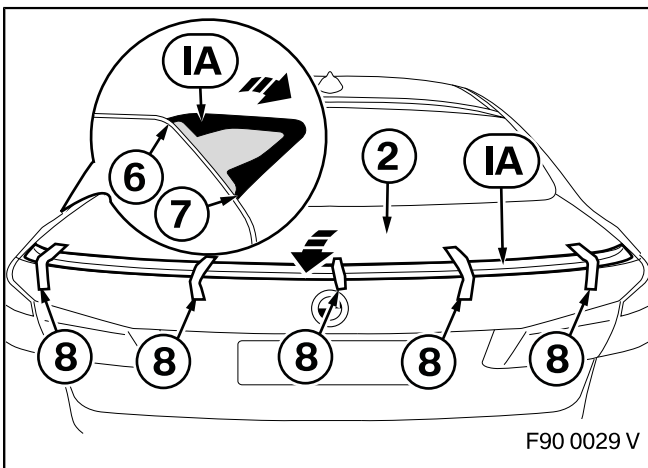

► Remove any excess liquid adhesive **IC** immediately. ◀

Position the "Carbon Pro rear spoiler" **IA** between the marks (3) and align it.


Pull the centre of the "Carbon Pro rear spoiler" **IA** to the rear in the direction shown by the arrow until the front gap (6) has closed. Then press the "Carbon Pro rear spoiler" **IA** onto the boot lid (2) so that the bottom gap (7) closes.

19. Install the "Carbon Pro rear spoiler" G30/F90

Secure the "Carbon Pro rear spoiler" **IA** with adhesive tape (8) first in the centre and then on the outside. Do not remove the adhesive tape (8) for at least 6 hours.

20. Installing the "exhaust system support adapter cover" G30/G31

Underfloor trim versions

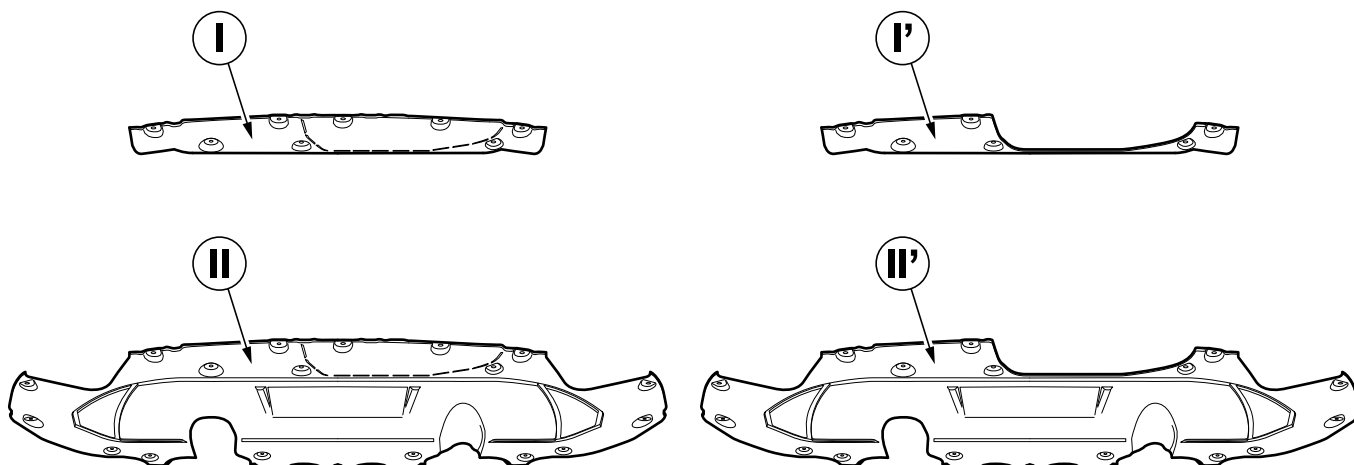

G30 0263 M

I Small underfloor trim for cars without trailer tow hitch (SA 3AC)

II Large underfloor trim for cars without trailer tow hitch (SA 3AC)


I' Small underfloor trim for cars with trailer tow hitch (SA 3AC)

II' Large underfloor trim for cars with trailer tow hitch (SA 3AC)

▶ For the sake of simplicity, all the illustrations for installing the "matt black rear diffuser" **EA** and "rear diffuser, carbon" **FA** on the car show the small underfloor trim for cars without trailer tow hitch (SA 3AC) **I**. Proceed accordingly to install it on cars with the **II**, **I'** and **II'** versions of the underfloor trim. ◀

▶ For the sake of simplicity, in the following description the designations "small underfloor trim" **I** and "large underfloor trim" **II** are used.

For all retrofitted items

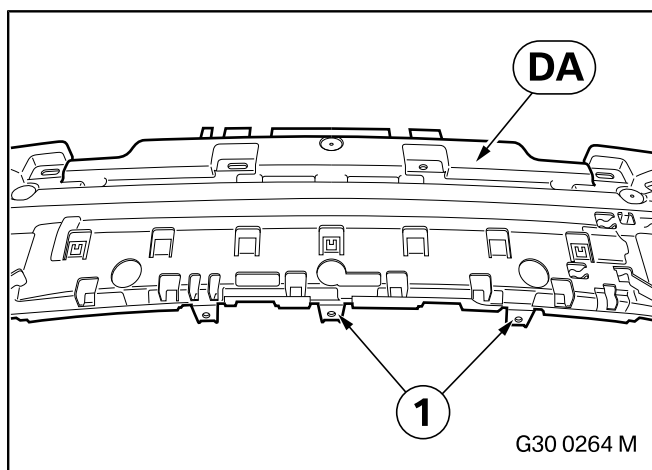

For cars with trailer tow hitch (SA 3AC):


Break the lugs (1) off the "Exhaust system support adapter cover" **DA** with a suitable tool.

For all cars:

Install the control units and antennas from the standard "exhaust system support adapter cover" on the "exhaust system support adapter cover" **DA** as described in **ISTA/AIR**.

Install the "exhaust system support adapter cover" **DA** as described in **ISTA/AIR**.


20. Installing the "exhaust system support adapter cover" G30/G31

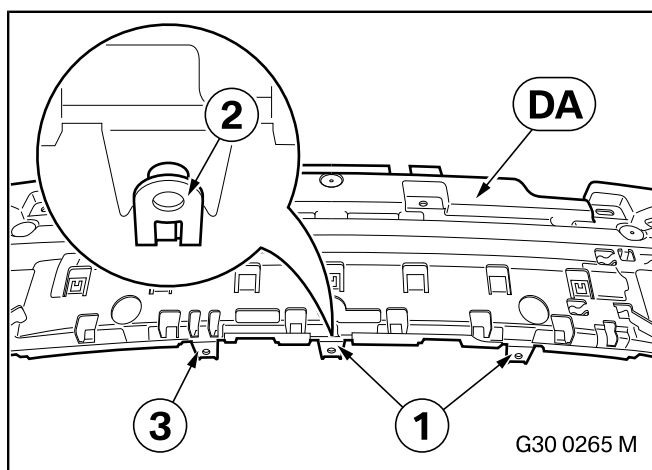

▶ The lugs (1) are only present on cars without a trailer tow hitch (SA 3AC). ◀


Place clips (2) from the standard "Exhaust system support adapter cover" on the lugs (1) and (3) of the "Exhaust system support adapter cover" **DA**.

Install the rear cover without the "bottom rear trim" as described in **ISTA/AIR**.

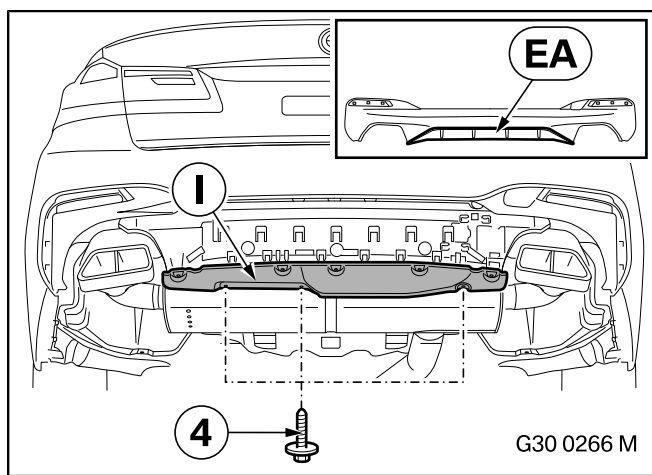


For cars with "Small underfloor trim" I to install "Matt black rear diffuser" EA:

Install "small underfloor trim" **I** as described in **ISTA/AIR**. Only tighten the hexagon screws (4) on the standard component shown here.

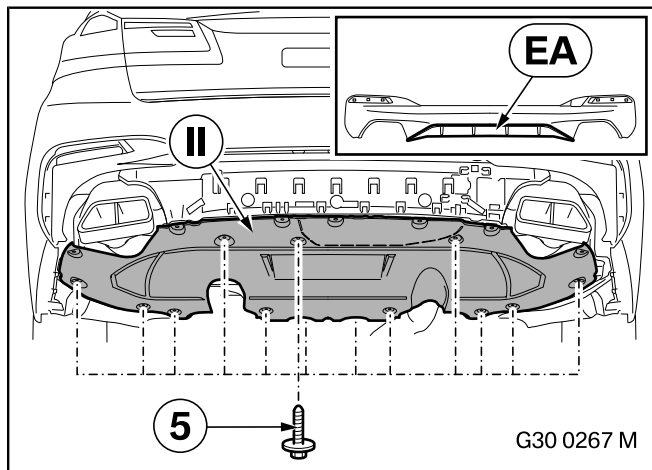

For cars with "Large underfloor trim" II to install "Matt black rear diffuser" EA:

Install "large underfloor trim" **II** as described in **ISTA/AIR**. Only tighten the hexagon screws (5) on the standard component shown here.

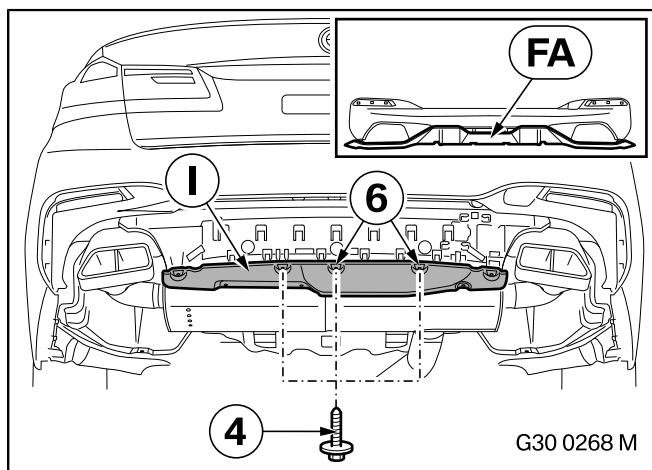


For cars with "Small underfloor trim" I to install "Carbon rear diffuser" FA:

▶ The fastening points (6) are only to be installed on cars without a trailer tow hitch (SA 3AC). ◀

Install "small underfloor trim" **I** as described in **ISTA/AIR**. Only tighten the hexagon screws (4) on the standard component shown here.


20. Installing the "exhaust system support adapter cover" G30/G31

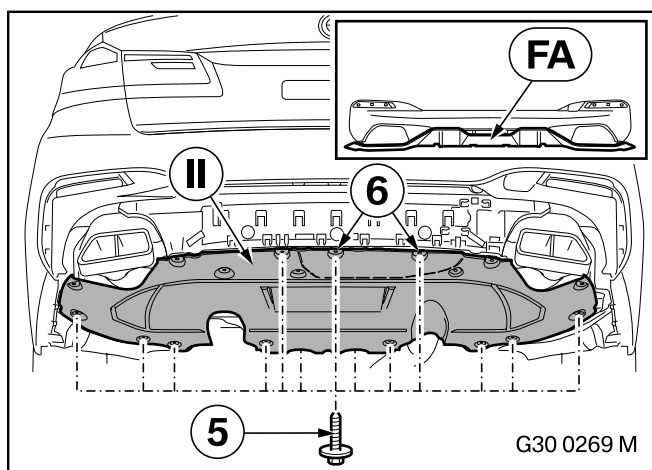

For cars with "Large underfloor trim" II to install "Carbon rear diffuser" FA:

▶ The fastening points (6) are only to be installed on cars without a trailer tow hitch (SA 3AC). ◀

Install "large underfloor trim" II as described in **ISTA/AIR**. Only tighten the hexagon screws (5) on the standard component shown here.

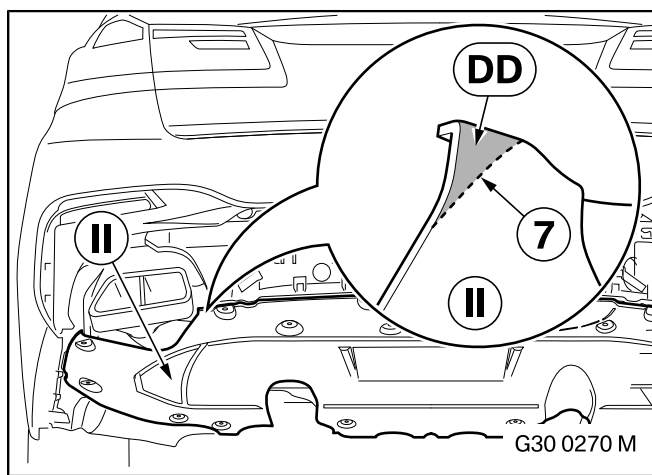

For cars with "Large underfloor trim" II:

Bond the blue template **DD** to the left-hand side and the red template **DD** to the right hand side of the "large underfloor trim" II.

Cut the "Large underfloor trim" II along the cutting edge (7) using a suitable tool.


21. Installing the "matt black rear diffuser" G30/G31

Painting instructions

Check that all the parts fit accurately on the car before painting them. Primed parts must be pre-treated accordingly before painting.


The BMW painting instructions must be observed (see ISTA/AIR /99 00 ...).

-  The "Matt black rear bumper trim" **DB** and the "Matt black rear diffuser" **EA** can be painted as required by the customer. ◀
-  Ensure that the "Exhaust system support adapter cover" **DA** has been installed. ◀

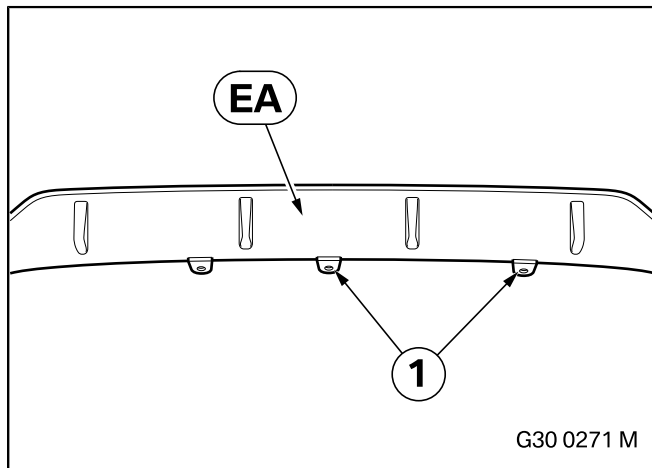

For cars with trailer tow hitch (SA 3AC):

Remove the lugs (1) from the "Matt black rear diffuser" **EA** using a suitable tool.

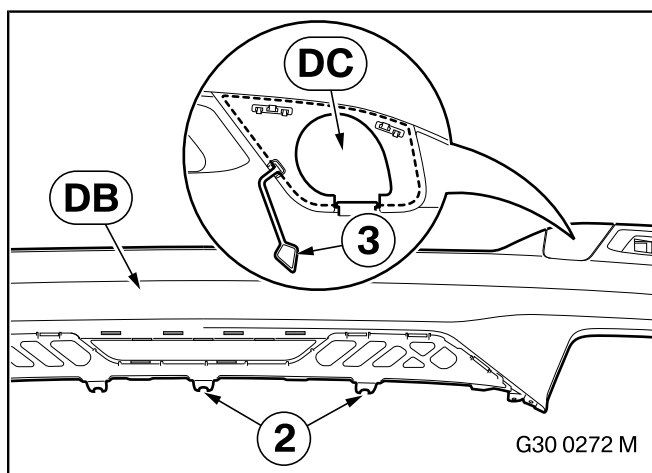


For cars with trailer tow hitch (SA 3AC):

Remove the lugs (2) from the "Matt black rear bumper trim" **DB** using a suitable tool.

For all cars:

Insert the "Towing eyelet cover" **DC** with retaining hook (3) into the "Matt black rear bumper trim" **DB** as shown.


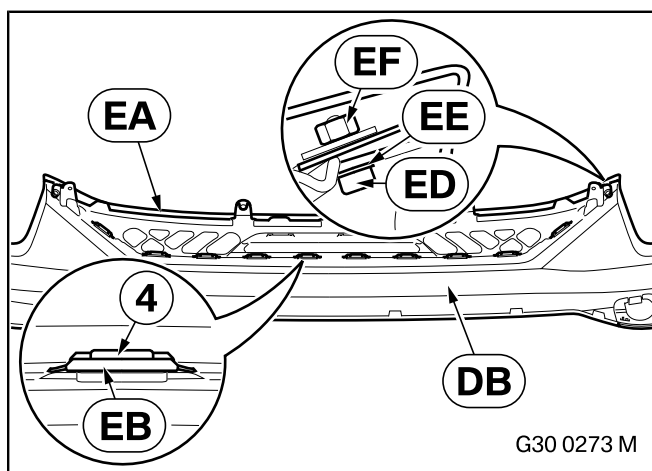


Insert the "Matt black rear diffuser" **EA** with lugs (4) into the "Matt black rear bumper trim" **DB**.

Install the clips **EB** on the lugs (4) using a suitable tool.

Secure "Matt black rear diffuser" **EA** at the left and right using ISA screws **ED**, washers **EE** and hexagon nuts with washer **EF** to the "Matt black rear bumper trim" **DB**.

21. Installing the "matt black rear diffuser" G30/G31

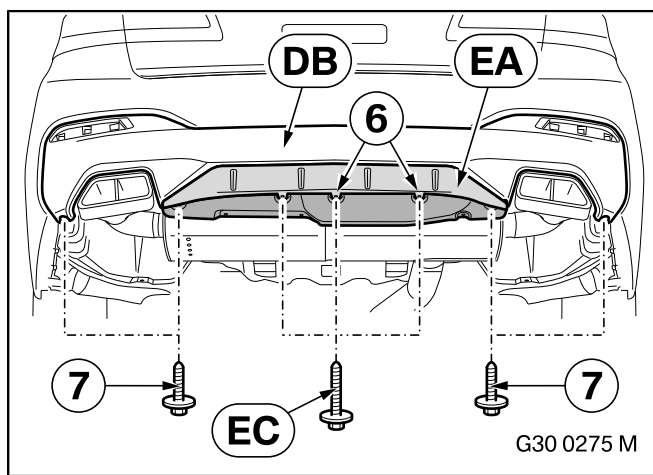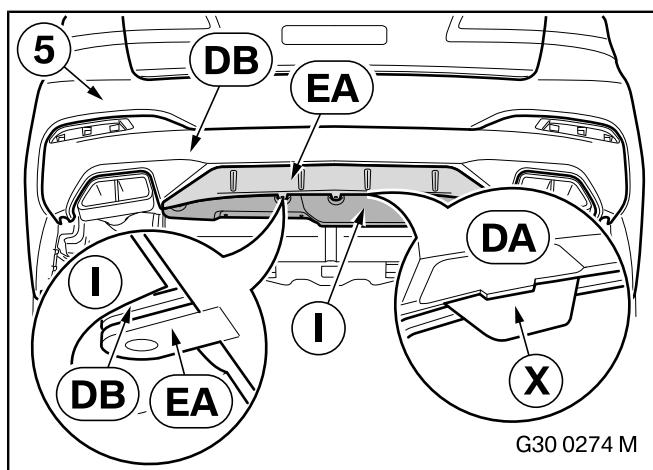

- For the sake of simplicity, the following installations show the "small underfloor trim" **I**. All the screw connections are also to be made on cars with "Large underfloor trim" **II**. ◀

Insert the assembly of "Matt black rear bumper trim" **DB** and "Matt black rear diffuser" **EA** in the rear trim (5) so that the four lugs **X** on the "Matt black rear bumper trim" **DB** are completely inserted in the "Exhaust system support adapter cover" **DA**.

The "Matt black rear bumper trim" **DB** and "Matt black rear diffuser" **EA** must be under the "Small underfloor trim" **I**.

- Ensure that the four lugs **X** inserted in the "Exhaust system support adapter cover" **DA** do not slip out during the remainder of the installation work. ◀

- The fastening points (6) are only to be installed on cars without a trailer tow hitch (SA 3AC). ◀

Install the assembly of the "Matt black rear bumper trim" **DB** and "Matt black rear diffuser" **EA** using hexagon screws **EC** and hexagon screws (7) from the standard component.

Install the rear reflector from the standard component as described in **ISTA/AIR**.

22. Installing the "rear diffuser, carbon" G30/G31


Painting instructions

Check that all the parts fit accurately on the car before painting them. Primed parts must be pre-treated accordingly before painting.

The BMW painting instructions must be observed (see ISTA/AIR /99 00 ...).


☐ The "Matt black rear bumper trim" **DB** and the "Matt black rear side scuttle" **FB** can be painted as required by the customer. ◀

☐ Ensure that the "Exhaust system support adapter cover" **DA** has been installed. ◀

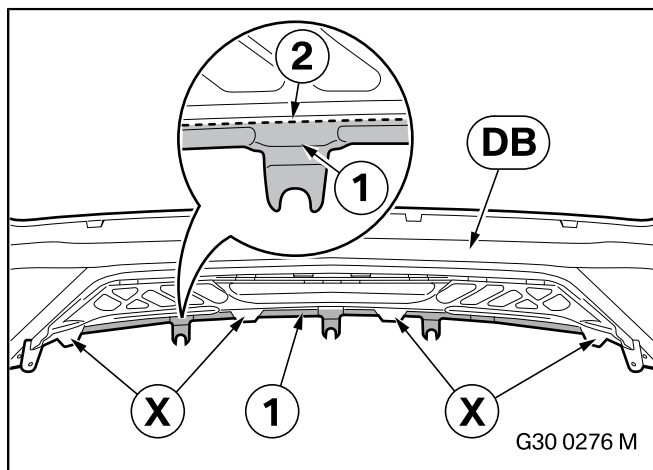


☐ Ensure that the four lugs **X** are not removed from the "Matt black rear bumper trim" **DB**. ◀

Cut the flange (1) along the cutting line (2) using a suitable tool.

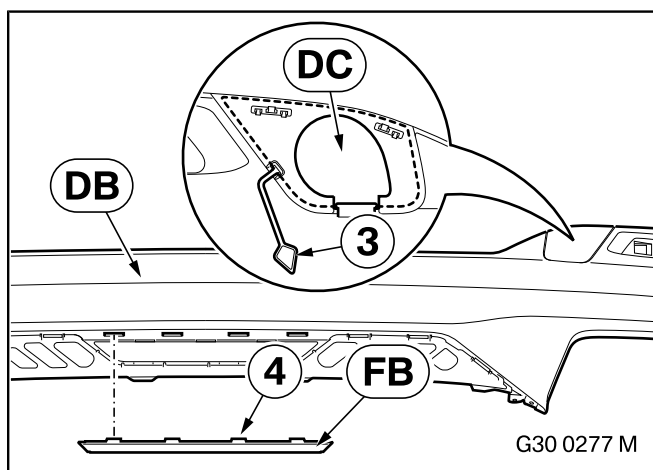


Insert the "Towing eyelet cover" **DC** with retaining hook (3) into the "Matt black rear bumper trim" **DB** as shown.

Insert the lugs (4) from the "Matt black rear side scuttle" **FB** into the "Matt black rear bumper trim" **DB**.

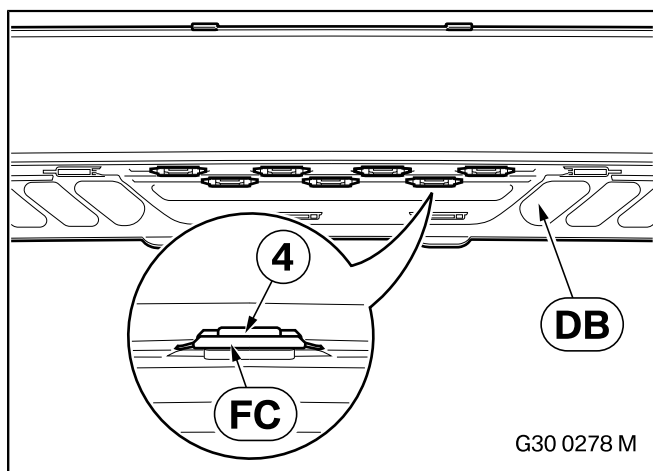


Install the clips **FC** on the lugs (4) using a suitable tool.

22. Installing the "rear diffuser, carbon" G30/G31

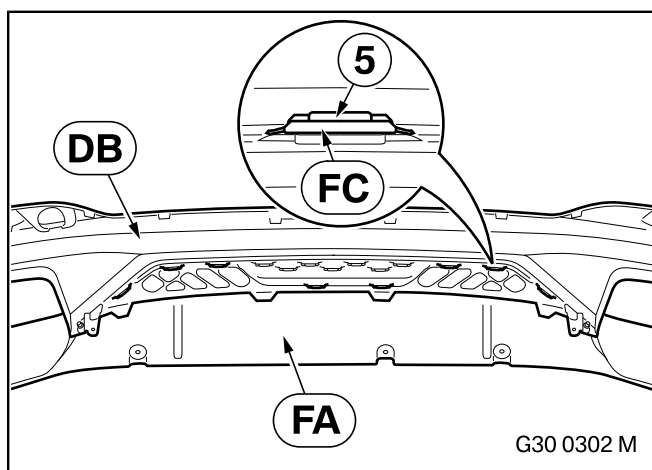


Insert the "Carbon rear diffuser" **FA** with lugs (5) into the "Matt black rear bumper trim" **DB**.

Install the clips **FC** on the lugs (5) using a suitable tool.

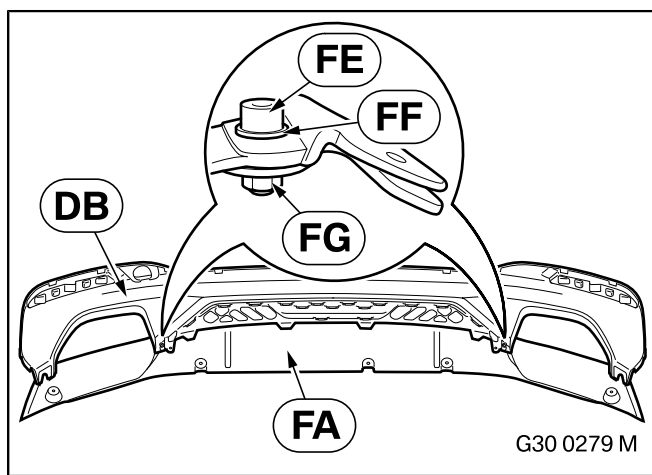


Secure "Carbon rear diffuser" **FA** at the left and right using ISA screws **FE**, washers **FF** and hexagon nuts with washer **FG** to the "Matt black rear bumper trim" **DB**.

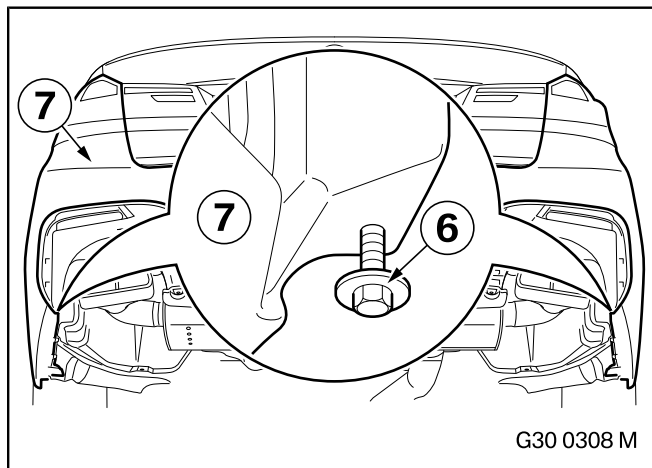

For the sake of simplicity, the following installations show the "small underfloor trim" **I**. All the screw connections are also to be made on cars with "Large underfloor trim" **II**. ◀

Unscrew the hexagon screws (6) for the standard component a few turns out of the rear trim (7).

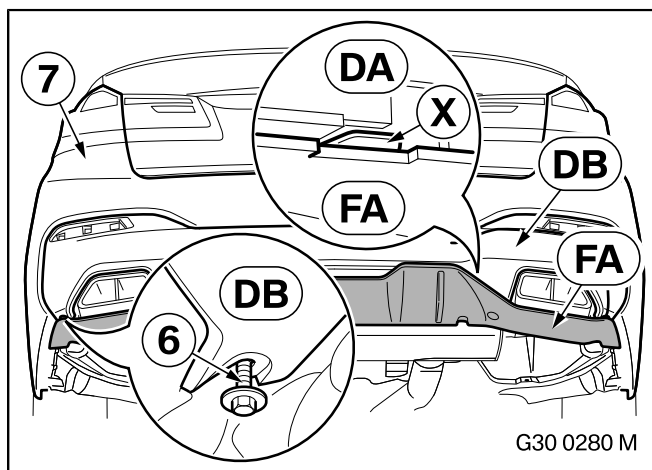


Insert the assembly of "Matt black rear bumper trim" **DB** and "Carbon rear diffuser" **FA** in the rear trim (7) so that the four lugs **X** are completely inserted in the "Exhaust system support adapter cover" **DA**.

Ensure that the hexagon screws (6) are positioned in the recess of the "Matt black rear bumper trim" **DB**.

Tighten the hexagon screws (6) on the left and right of the rear trim (7).

22. Installing the "rear diffuser, carbon" G30/G31

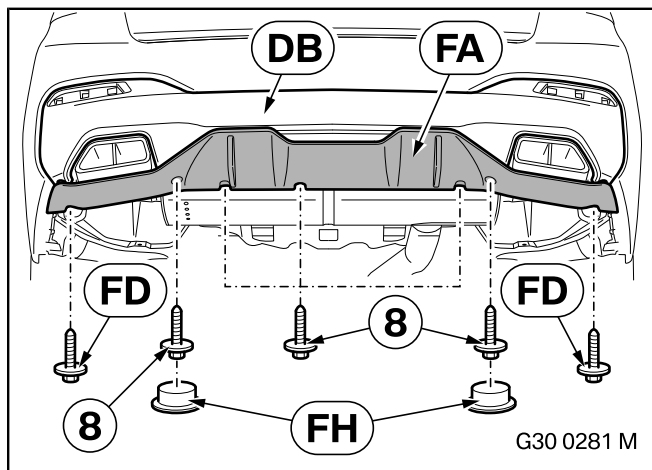


Ensure that the four lugs **X** inserted in the "Exhaust system support adapter cover" **DA** do not slip out during the remainder of the installation work. ◀

Install the assembly of the "Matt black rear bumper trim" **DB** and "Carbon rear diffuser" **FA** using hexagon screws **FD** and hexagon screws (8) from the standard component.

Insert sealing bung **FH** into the "Carbon rear diffuser" **FA**.

Install the rear reflector from the standard component as described in **ISTA/AIR**.

23. Installing the "rear diffuser, carbon" F90

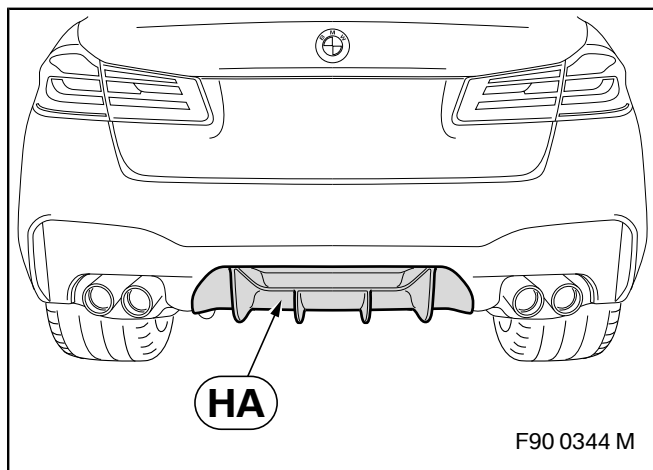

Remove standard installed rear diffuser as described in **ISTA/AIR**.

Install "rear diffuser, carbon" **HA** in the same manner as the standard component, as described in **ISTA/AIR**.

24. Concluding work and coding

For all vehicles, the retrofit system requires programming/coding if the "rear diffuser, carbon" retrofit kit **FA** and **HA** is installed.

The retrofit system requires programming/coding with 550i and 550d cars when installing the retrofit kit "left/right front attachment, carbon" **A'**, **B'** and the retrofit kit "front attachment, carbon" **C**.

- Connect the battery
- Connect the battery charger to the car
- Connect the car to the ISTA workshop system
- Open the ISTA/P car programming facility
- If using ISTA/P, please note the instructions provided in the ISTA/P application documentation
- K-word retrofit for "rear diffuser, carbon" **FA** and **HA**: Select "DSMO" via the – **Conversions** – path and work through the created action plan
- K-word retrofit for "right/left front attachment, carbon" **A'**, **B'** and "front attachment, carbon" **C**: Select "M Performance front attachment coding of FGS parameters (MFSG)" via the – **Conversions** – path and work through the action plan
- If necessary, carry out a vehicle test using the ISTA system, and note, or work through, any errors that has been recorded
- Conduct a function test
- Re-assemble the car
- Give the customer the customer information